


Globe Valves **ANSI Class 150**

Model 11 ½ thru 2" *(Investment Cast Body)*

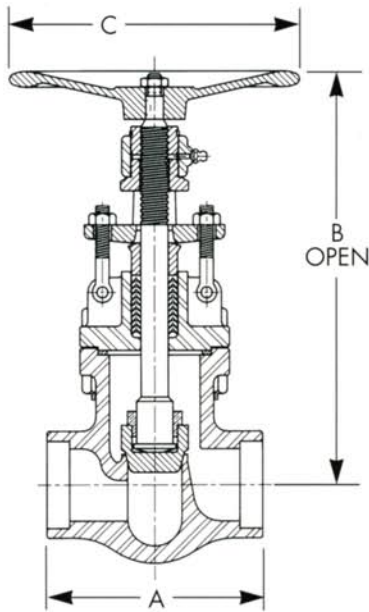


Size (in.)	½	¾	1	1 ½	2
A	3 ¼	3 ¾	4 ¼	5 ¼	5 ¾
B	8 ¼	8 ¾	9 ¼	13 ¼	14 ¼
C	4	4	4	8	8
Weight (lbs.)	5	5	7	12	17

Socketweld=11-X; Screwed End=11-SE

Features:

- OS&Y
- Bolted bonnet
- Solid wedge
- TFE gasket
- Rising stem
- Integral seat
- TFE packing
- SS bolting

Model 215 ½ thru 2" *(Investment Cast Body)*

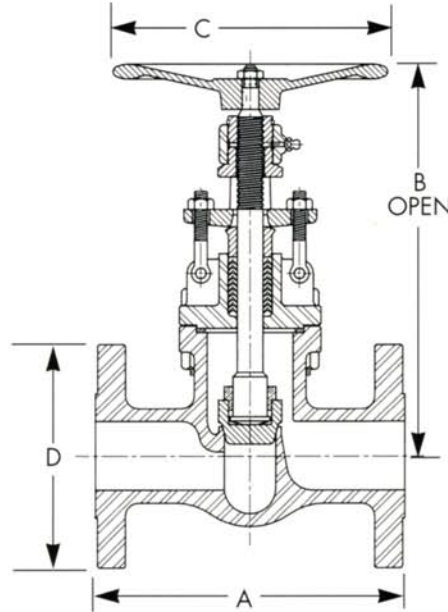

Size (in.)	½	¾	1	1 ½	2	3	4	6	8
A	4 ¼	4 ¾	5	6 ¼	8	9 ¼	11 ¼	16	19 ¼
B	8 ¼	8 ¾	9 ¼	13 ¼	14 ¼	14 ¼	15 ¼	20 ¼	24 ¼
C	4	4	4	8	8	12	12	16	16
D	3 ¼	3 ¾	4 ¼	5	6	7 ¼	9	11	13 ¼
Weight (lbs.)	6	7	8	15	23	56	74	145	246


Raised Face Flange=215-RF; Flat Faced Flange=215-FF; Ring Type Joint Flange=215-RTJ; Butt weld=215-BW

Specifications:

- Sizes ½ thru 8"*
- Pressures: ANSI Class 150
- Ends: flanged, threaded, socketweld and butt weld
- Materials: cast SS and exotic alloy
- Design: ANSI B16.34 and B16.10

*For larger sizes, consult factory.

Model 215 ½ thru 8"* *(Sand Cast Body)*

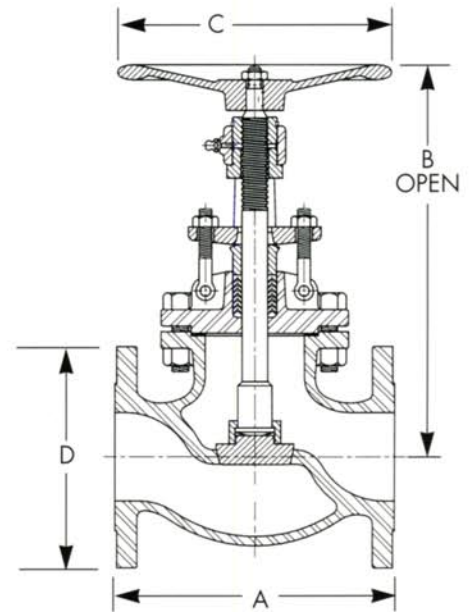

Options:


- Exotic alloys
- Renewable disc
- Hardfacing
- Jackets
- Special bolting
- Cryogenics
- Operators
- Acid shields
- Alloy analyzer test

COOPER®



Globe Valves **ANSI Class 300**


Model 4301 ½ thru 2" (Investment Cast Body)

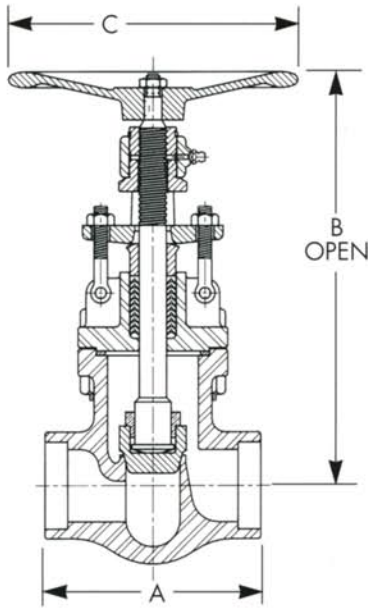

Size (in.)	½	¾	1	1 ½	2
A	3 ¼	3 ¾	4 ¼	5 ¼	5 ¾
B	8 ¾	8 ¾	9 ¾	13 ¼	14 ¾
C	4	4	4	8	8
Weight (lbs.)	8	12	15	25	38

Socketweld=4301-X; Screwed End=4301-SE


Model 230 ½ thru 2" (Investment Cast Body)

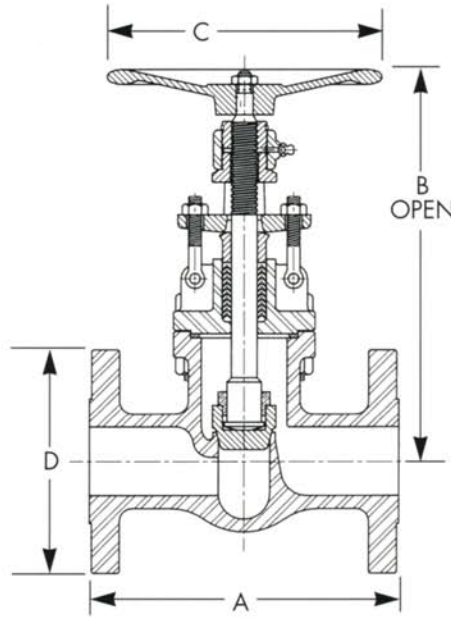

Size (in.)	½	¾	1	1 ½	2	3	4	6
A	6	7	8	9	10 ½	12 ½	14	17 ½
B	8 ¾	8 ¾	9 ¾	13 ¼	14 ¾	19 ½	22 ¾	26 ¼
C	4	4	4	8	8	12	12	16
D	3 ¾	4 ¾	4 ¾	6 ¼	6 ½	8 ¼	10	12 ½
Weight (lbs.)	13	17	25	36	54	92	147	280

Raised Face Flange=230-RF; Flat Faced Flange=230-FF; Ring Type Joint Flange=230-RTJ; Butt weld=230-BW

Model 230 3 thru 6"* (Sand Cast Body)

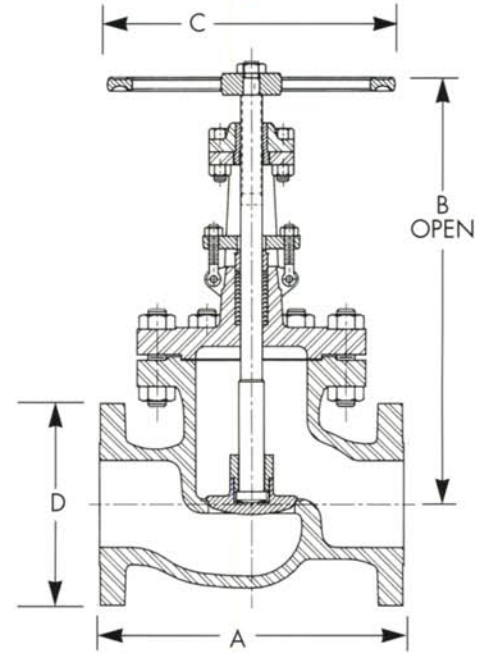

Features:

- OS&Y
- Bolted bonnet
- Solid wedge
- TFE gasket
- Rising stem
- Integral seat
- TFE packing
- SS bolting

Specifications:

- Sizes ½ thru 6"*
- Pressures: ANSI Class 300
- Ends: flanged, threaded, socketweld and butt weld
- Materials: cast SS and exotic alloy
- Design: ANSI B16.34 and B16.10

Options:


- Exotic alloys
- Renewable disc
- Hardfacing
- Jackets
- Special bolting
- Cryogenics
- Operators
- Acid shields
- Alloy analyzer test

*For larger sizes, consult factory.




COOPER®


Model 4601 ½ thru 2" (Investment Cast Body)

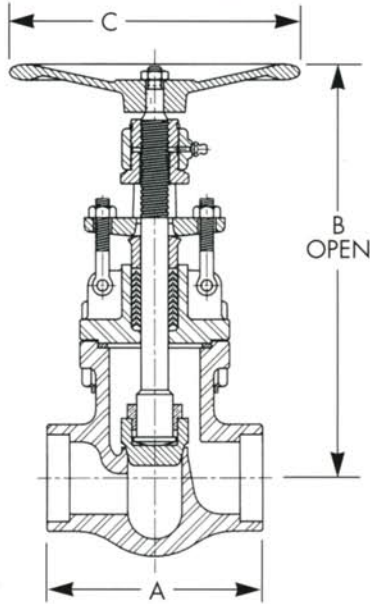

Model 260 ½ thru 2" (Investment Cast Body)

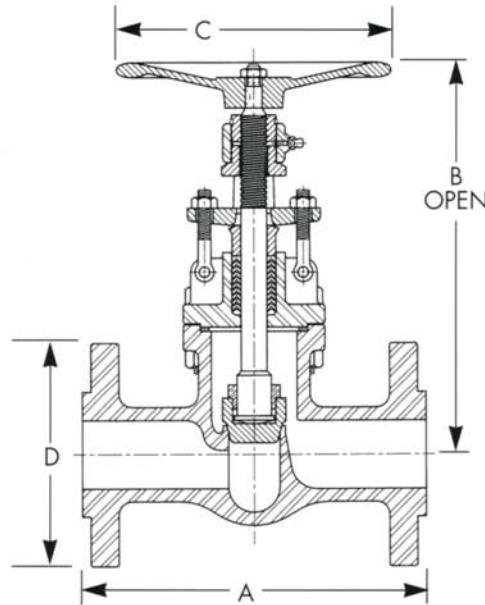

Model 260 3 thru 6"* (Sand Cast Body)

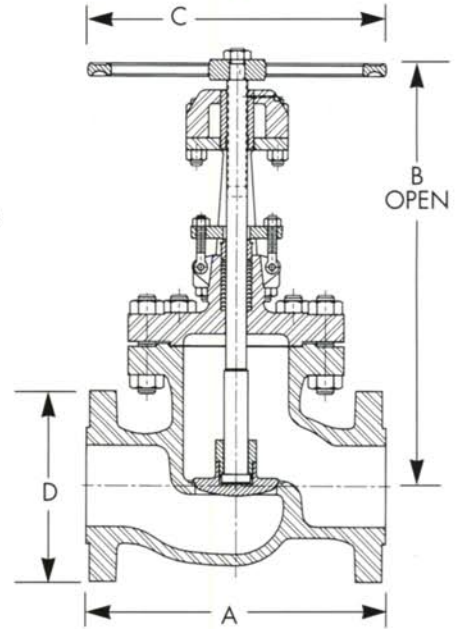

Size (in.)	½	¾	1	1 ½	2
A	3 ¾	3 ¾	4 ¼	9 ½	11 ½
B	8 ¾	8 ¾	9 ¾	16 ¾	18 ¾
C	4	4	4	8	10
Weight (lbs.)	10	14	17	29	39

Socketweld=4601-X; Screwed End=4601-SE

Size (in.)	½	¾	1	1 ½	2	3	4	6
A	6 ½	7 ½	8 ½	9 ½	11 ½	14	17	22
B	8 ¾	8 ¾	9 ¾	16 ¾	18 ¾	20 ¼	23 ¾	34 ¾
C	4	4	4	8	10	12	16	22
D	3 ¾	4 ¾	4 ¾	6 ¾	6 ¾	8 ¾	10 ¾	14
Weight (lbs.)	14	16	26	60	95	160	320	637

Raised Face Flange=260-RF; Flat Faced Flange=260-FF; Ring Type Joint Flange=260-RTJ; Butt weld=260-BW

Features:

- OS&Y
- Bolted bonnet
- Solid wedge
- TFE gasket
- Rising stem
- Integral seat
- TFE packing
- SS bolting

Specifications:

- Sizes ½ thru 6"
- Pressures: ANSI Class 600
- Ends: flanged, threaded, socketweld and butt weld
- Materials: cast SS and exotic alloy
- Design: ANSI B16.34 and B16.10

*For larger sizes, consult factory.

**P.O.A.—consult factory.

Options:

- Exotic alloys
- Renewable disc
- Hardfacing
- Jackets
- Special bolting
- Cryogenics
- Operators
- Acid shields
- Alloy analyzer test

COOPER®

