



Southern California Valve

(281) 482-4728 • [www.scvvalve.com](http://www.scvvalve.com)



## 3-Piece Trunnion Ball Valves - API 6D Full & Reduced Port Bolted & Welded Body Construction

Class: 150 - 2500  
Sizes: 1" - 48"





Southern California Valve



**SOUTHERN CALIFORNIA VALVE** manufactures some of the most dependable cast and forged steel Ball Valves in the industry. Our products are manufactured and tested in accordance with respective API, ASME, and ANSI standards. With features such as double block and bleed capabilities, secondary sealant injections, and spring energized self relieving seats, the SCV design offers many features and options beneficial for oil, gas, and liquid applications making it one of the most preferred ball valves on the market.

Innovative valve solutions.™

For more information call us @ (281) 482-4728 or visit our website @ [www.scvvalve.com](http://www.scvvalve.com)

### 2-Piece Flanged Floating Ball Valves

- Basic Design: ANSI/ASME B16.34, conforms to API 6D
- Inspection & Testing: API 598
- Flange Dimensions: ANSI/ASME 16.5 (1/2" - 10")
- Face-to-Face: ANSI/ASME B16.10
- Fire Safe: API 607/BS 6755


### 3-Piece Trunnion Ball Valves - API 6A

- Basic Design: API 6A
- Inspection and Testing: API 6A
- Flange Dimensions: API 6A
- Face-to-Face: API 6A
- Fire Safe: API 607/BS 6755

### 3-Piece Trunnion Ball Valves - API 6D Bolted & Welded Body Construction

- Basic Design: API 6D
- Inspection and Testing: API 6D
- Flange Dimensions: 1" - 24" ANSI/ASME B16.5 (2" - 24"); 26" & up ANSI/ASME B16.47
- Face-to-Face: Flanged ANSI/ASME B16.10; Buttweld ANSI/ASME B16.25
- Fire Safe: API 607/BS 6755

**Note:** SCV reserves the right to change any technical design and dimensional data without prior notice. Please contact SCV to confirm all Dimensions and Data offered in this catalog.

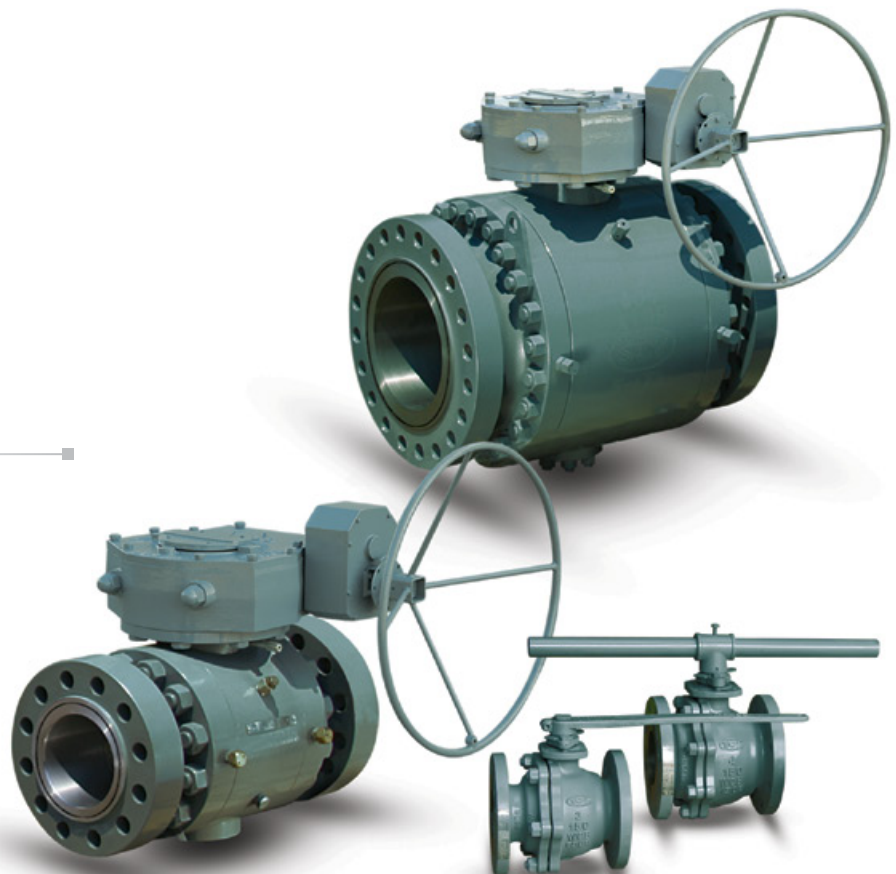



**Southern California Valve**

---

Southern California Valve's product lines include commodity valves as well as specialty valves in all Sizes, Pressure Classes & Metallurgy; including Carbon Steel, Stainless Steel & Exotic Alloys. The valve types include Gate, Globe, Swing Check - Bolted Bonnet & Pressure Seal Bonnet, Ball - floating, trunnion, rising stem, Thru-Conduit Gate - slab and expanding, Swing Check - Full and Regular Port, Lubricated Plugs, Dual Plate Checks - wafer and lug. Southern California Valve's High Quality Standards demand 100% pressure testing of every valve to insure its reliability and full customer satisfaction.

At Southern California Valve, we pride ourselves with high quality products in the commodity and specialty valve lines, as well as, timely deliveries, and competitive prices.

### **Company History** ■■■■■■■■■■

Southern California Valve was established in 1972. The primary focus of the Company was to provide full inline field service for valve maintenance as well as in house valve modifications. While serving the Power Industry, Paper & Pulp, Oil & Gas, and the Petro Chemical Industry; through years of dedication and commitment to quality and service, Southern California Valve has become one of the largest West Coast full range, field service companies, with a reputation for superior quality.

In the mid 1970s, Southern California Valve entered the valve manufacturing industry, primarily serving the Power Industry. Since that time, Southern California Valve has expanded their products to cover a broad range of valves. Southern California Valve holds the API 6A & API 6D Monogram, API Q1 Quality Management System, and ASME "R" stamp. The Corporate office and manufacturing facility is located in Santa Fe Springs, California. The Sales and Projects office is located in Santa Fe, Texas.

### **Mission Statement** ■■■■■■■■■■

Southern California Valve is committed to consistently providing products that meet or exceed customer and regulatory specifications. SCV aims to enhance customer satisfaction through implementing the highest levels of quality standards while assuring full conformity to those requirements.

# Table of Contents

	Page
Table of Contents.....	1
Complete Product Line.....	2
Certifications .....	3
• American Petroleum Institute (API)	
• ISO 9001:2008	
• Canadian Registration Numbers	
• CE PED	
Figure Number Chart.....	4 & 5
Technical Data for Optional Seal & Seat Selections.....	6
Seal & Seat Pressure Temperature Chart .....	7
Valve ID Tag & Valve Markings Identification .....	8
<b>3-PIECE TRUNNION BALLS - API 6D</b>	
<b>BOLTED &amp; WELDED BODY CONSTRUCTION .....</b>	<b>9</b>
Bolted Body Expanded View.....	10
Welded Body Expanded View .....	10
Bolted & Welded Body Construction Bill of Materials.....	11
Design Features & Applications.....	12 & 13
150 Class Full Port.....	14
150 Class Reduced Port.....	15
300 Class Full Port.....	16
300 Class Reduced Port.....	17
600 Class Full Port.....	18
600 Class Reduced Port.....	19
900 Class Full Port.....	20
900 Class Reduced Port.....	21
1500 Class Full Port.....	22
1500 Class Reduced Port.....	23
2500 Class Full Port.....	24
2500 Class Reduced Port.....	25
Cv Values .....	26
Operating Torques .....	26
Pressure Temperature Ratings .....	27, 28, & 29
Flange Dimensions .....	30 & 31
Butt-welding Dimensions .....	32 & 34
Industry Standards for Valve Manufacturing .....	35
Terms and Conditions.....	36



# Complete Product Line

Call SCV today @ (281) 482-4728 for all your valve needs or visit us on the web @ [www.scvvalve.com](http://www.scvvalve.com).

## Carbon & Stainless Bolted Bonnet Gates

Sizes: 2" - 60"  
Class: 150 - 2500  
Design: API 600



## Carbon & Stainless Pressure Seal Gates

Sizes: 2" - 24"  
Class: 600 - 2500  
Design: API 600



## Carbon Steel Thru Conduit Slab & Expanding Gates

Sizes: 2" - 36"  
Class: 150 - 1500  
Design: API 6D



## Carbon & Stainless Bolted Bonnet Globes

Sizes: 2" - 24"  
Class: 150 - 2500  
Design: BS1873  
B16.34



## Carbon & Stainless Pressure Seal Globes

Sizes: 2" - 16"  
Class: 600 - 2500  
Design: BS1873  
B16.34



## Carbon & Stainless Bolted Cover Checks

Sizes: 2" - 52"  
Class: 150 - 2500  
Design: BS1868  
B16.34



## Carbon & Stainless Pressure Seal Checks

Sizes: 2" - 24"  
Class: 600 - 2500  
Design: API 600  
B16.34



## Carbon Steel Bolted Cover Piston Checks

Sizes: 1" - 24"  
Class: 150 - 2500  
Design: API 6D



## Dual Plate Checks Wafer & Lug

Wafer Sizes: 1.5" - 84"  
Wafer Class: 150 - 2500  
Lug Sizes: 2" - 48"  
Lug Class: 150 - 900  
Design: API 594



## Carbon & Stainless Bolted Cover Full Port Swing Checks

Sizes: 2" - 52"  
Class: 150 - 2500  
Design: API 6D



## Carbon & Stainless 2-Piece Floating Balls

Sizes: 1/2" - 12"  
Class: 150 - 300  
Design: B16.34



## Carbon & Stainless 3-Piece Trunnion Balls

Sizes: 2-1/16" - 13-5/8"  
Pressure: 2000, 3000 & 5000  
Design: API 6A



## Carbon & Stainless 3-Piece Trunnion Balls Bolted & Welded Body

Sizes: 2" - 48"  
Class: 150 - 2500  
Design: API 6D



## Sub-Sea 3-Piece & Top Entry Trunnion Balls

Bolted & Welded Body  
Sizes: 2" - 24"  
Class: 150 - 2500  
Design: API 6D  
API 6DSS



## Carbon & Stainless Double Block & Bleed Trunnion Balls

Sizes: 2" - 24"  
Class: 150 - 2500



## Carbon & Stainless 3-Piece Full Port Balls

Sizes: 1/4" - 3"  
Class: 3705 W.O.G.  
Design: B16.34



## Forged Steel Gates

Sizes: 3/8" - 2"  
Class: 800 - 2500  
Design: API 602



## Forged Steel Globes

Sizes: 3/8" - 2"  
Class: 800 - 2500  
Design: API 602



## Forged Steel Swing Checks

Sizes: 3/8" - 2"  
Class: 800 - 2500  
Design: API 602



## Forged Steel Piston Checks

Sizes: 3/8" - 2"  
Class: 800 - 2500  
Design: API 602



## Carbon Steel Dual Seal Expanding Plugs

Sizes: 2" - 24"  
Class: 150 - 900  
Design: API 6D



## Carbon Steel Lubricated Plugs

Sizes: 1/2" - 36"  
Class: 150 - 2500  
Design: API 6D



## Carbon & Stainless Rising Stem Balls

Sizes: 2" - 24"  
Class: 150 - 1500  
Design: API 6D



# Certifications & Registrations

## American Petroleum Institute (API)



API 6A



API 6D

## International Organization for Standardization (ISO)



ISO 9001:2008 Certificate

## European Conformance Pressure Equipment Directive



CE PED Certificate

(Modified for display purposes. Actual certificates available on our web site ([www.scvalve.com](http://www.scvalve.com)).

## Canadian Registration Number

- CRN# OC7063.2 - Alberta
- CRN# OC07063.24 - Manitoba
- CRN# OC07063.25 - Ontario

# SCV Figure Number Chart

1

2

3

4

5

6

Valve Type	Bore Size	Pressure Class	Body/Bonnet	Body Material	Trim Material
BAL = Ball	.02 = 1/16"	.5 = 50	B = Bolted	01 = Cast Iron	10 = CR13
DBV = Double Ball Valve	.03 = 1/8"	.7 = 75	L = Lug	02 = A352/LCC	11 = CR13/HF
DCK = Dual Wafer Check	.25 = 1/4"	01 = 150	N = NRS Bolted	03 = A352/LC2	12 = CR13 HF/HF
DSP = Dual Seal Plug	.50 = 1/2"	02 = 200	P = Pressure Seal	04 = CF8	13 = A105/ENP
FCK = Full Port Check	.07 = 9/16"	03 = 300	S = Seal Weld	05 = Ductile	14 = Steel/Chrome
GAT = Gate	.08 = 13/16"	04 = 400	T = Top Entry	06 = CF8M	15 = LF2/ENP
GLB = Globe	.75 = 3/4"	06 = 600	U = Union	08 = A216 WCC	16 = 416
PCK = Piston Check	01 = 1"	08 = 800	W = Wafer	09 = WC9/F22	17 = 17 4-PH
PLG = Plug	1.2 = 1-1/16"	09 = 900	Y = Y-Pattern	10 = A216 WCB	20 = Alloy 20
RSB = Rising Stem Ball	1.3 = 1-1/8"	12 = 125		11 = A352 LCB	21 = Alloy 20/HF
SCK = Swing Check	1.4 = 1-1/4"	15 = 1500		12 = A350 LF2	22 = F-22
TCG = Thru Conduit Gate	1.5 = 1-1/2"	17 = 175		13 = A105	25 = Inconel Overlay
TCK = Tilting Disc Check	1.8 = 1-13/16"	20 = 2000		14 = LC3/LF3	28 = Sanicro 28
WCK = Wafer Check	02 = 2"	25 = 2500		15 = A217 C5	30 = 4130
	2.2 = 2-1/16"	30 = 3000		16 = WC6/F11	31 = 321
	2.3 = 2-1/8"	45 = 4500		17 = 17-4 PH	32 = 316L
	2.5 = 2-1/2"	50 = 5000		18 = LF6	33 = 304/HF
	2.7 = 2-9/16"	60 = 6000		19 = LF4	34 = 304
	03 = 3"	10 = 10000		20 = Alloy 20	35 = 316/HF
	3.3 = 3-16"	05 = 15000		22 = F-22	36 = 316
	04 = 4"	37 = 3705		24 = 254 SMO	37 = 317/HF
	4.2 = 4-1/16"			25 = F5	38 = 317
	05 = 05"			26 = F91	39 = 1040
	06 = 06"			27 = C12A	41 = 410/F6a
	08 = 08"			28 = Sanicro 28	42 = Full Teflon
	10 = 10"			29 = C12/F9	44 = F44 Duplex
	12 = 12"			30 = AISI 4130	47 = 347
	14 = 14"			31 = 321	48 = 347/HF
	16 = 16"			32 = 321L	49 = Carpenter
	18 = 18"			33 = 304L	50 = Monel
	20 = 20"			34 = 304	51 = F51 Duplex
	22 = 22"			35 = 316L	52 = Nickel Alloy
	24 = 24"			36 = 316	53 = F53 Duplex
	26 = 26"			37 = 317L	54 = A516/ENP
	30 = 30"			38 = 317	55 = F55 Duplex
	32 = 32"			40 = AISI 4140	56 = A36/ENP
	36 = 36"			41 = 410/F6a	57 = A537/ENP
	40 = 40"			44 = F44 Duplex	60 = Duplex
	42 = 42"			47 = 347	61 = Super Duplex
	48 = 48"			48 = 347L	62 = Inconel 625
	50 = 50"			49 = Carpenter	63 = Inconel 600
	54 = 54"			50 = Monel	69 = Naval Brass
	60 = 60"			51 = F51 Duplex	70 = Bronze
	72 = 72"			52 = Nickel Alloy	71 = Aluminum
	78 = 78"			53 = F53 Duplex	78 = Inconel 718
	72 = 72"			54 = ASTM A516	80 = Alu/Brz
	78 = 78"			55 = F55 Duplex	81 = Ni Alu/Brz
				56 = ASTM A36	82 = Inconel 825
				57 = ASTM A537	83 = Hastelloy
				60 = Duplex	86 = 8026
				61 = Super Duplex	87 = 487
				62 = Inconel 625	90 = Titanium
				63 = Inconel 600	91 = Tantalum
				69 = Naval Brass	92 = Inconel 925
				70 = Bronze	93 = Tungsten Carbide
				71 = Aluminum	96 = Zirconium
				78 = Inconel 718	
				80 = Alu Bronze	
				81 = Ni Alu/Brz	
				82 = Inconel 825	
				83 = Hastelloy B	
				84 = Hastelloy C	
				86 = AISI 8026	
				87 = 487	
				90 = Titanium	
				91 = Tantalum	
				96 = Zirconium	

Note: SCV Figure Chart is subject to change without notice.



7

8

9

10

11

12

Ends	Operation	Configuration	Seal Material	Seat Material	Special
C = Clamp	B = Bare Stem	32 = 3 Way 2 Port	4 = 304 Ring	D = Devlon	By Pass
F = Flat	D = Dual Acting	3F = 3 Way Floater	6 = 316 Ring	G = Graphite	Cadium Coat
H = Hub	E = Electric	3T = 3 Way Trunnion	B = Buna	K = PCTFE	Cryogenic
J = RTJ	G = Gear	43 = 4 Way 3 Port	E = EPDM	M = Metal Seated	Epoxy Paint
N = Nipples	H = Handwheel	4F = 4 Way Floater	F = Fluorosilicone	N = Nylon	Lip Seal
M = SW x TH	L = Lever	4T = 4 Way Trunnion	G = Grafoil	O = Nova	Metal Hardface
O = ODD	O = Oil/Gas	EX = Expanding	H = HNBR	P = PEEK	Metal Tungsten Carbide
R = RF	S = S/Return	FF = Full Floater	K = Kalrez	R = RPTFE	Nitride
S = SW	Y = Hydraulic	FT = Full Trunnion	N = Neoprene	T = Teflon	Outside WT
T = TH		RF = Red, Floater	P = Polyuerethane		QPQ Inturnal
W = WE		RT = Red, Trunnion	R = NBR		Slam Retard
A = RF x BW		SJ = Steam Jacket	S = Silicone		Stancoat
B = RTJ x BW			T = Teflon		Sub Sea
			U = Floursint		Teflon Lined
			V = Viton		Top Extension
					Zinc Base

## Figure Number Profile

1	2	3	4	5	6	7	8	9	10	11	12	
BAL	02	01	B	13	13	R	L	FT	-	H	D	X

No.	Figure Number Code	Description
1	Valve Type	Identifies the valve body design (gate, globe, ball, plug, etc.)
2	Bore Size	Identifies nominal port size (1/4" to 78")
3	Pressure Class	Identifies pressure classes ranging from 50 to 15,000
4	Body/Bonnet	Identifies body and bonnet material configuration (bolted bonnet, pressure seal, top entry, etc.)
5	Body Material	Identifies body material composition (A105, WCB, Stainless Steel, F51, etc.)
6	Trim Material	Identifies trim material composition (ENP, 316, F6, Cr13, HF, etc.)
7	Ends	Identifies end connection configuration (weld end, RTJ, socket weld, hub, etc.)
8	Operation	Identifies valve operation mechanism (electric, gear, hydraulic, lever, etc.)
9	Configuration (ball & expanding gate only)	Identifies valve configuration (floater, trunnion, etc.)
10	Seal Material	Identifies seal material composition (Buna, EPDM, Grafoil, HNBR, Neoprene, Teflon, etc.)
11	Seat Material	Identifies seat material composition (Devlon, Graphite, PCTFE, Nylon, PEEK, Teflon, etc.)
12	Special	Identifies special treatments or configurations (when applicable)

## Sample Figure Numbers & Descriptions

Valve Type	Sample Figure #	Description
Trunnion Ball	BAL0201B1313RLFF-HD	Ball Valve, 2", 150#, Bolted Bonnet, A105 Body, ENP Trim, HNBR Seals, Devlon Seats, Raised Face, Lever Operated, Full Port, Trunnion Mtd.
Floating Ball	BAL0201B1036RLFF-/T	Ball Valve, 2", 150#, Bolted Bonnet, A216 WCB Body, 316SS Trim, PTFE Seats, Raised Face, Lever Oper., Full Port, Floating Ball
Dual Plate Wafer Check	DKK0406W1035R	Dual Plate Wafer Check, 4", 600#, Wafer Style, A216 WCB Body, 316SS/HF Trim, Raised Face
Full Port Swing Check	FCR0409B1011J	Full Port Swing Check, 4", 900#, Bolted Bonnet, A216 WCB Body, Cr13/HF Trim, Ring Type Joint
Wedge Gate	GAT0303P1035RH	Wedge Gate, 3", 300#, Pressure Seal, WCB, 316SS/HF Trim, Raised Face, Hand Wheel Operated
Globe	GLB0803B1011RH	Globe, 8", 300#, Bolted Bonnet, WCB, Cr13/HF Trim, Raised Face, Hand Wheel Operated
Swing Check	SCK0601B1036R	Swing Check, 6", 150#, Bolted Bonnet, WCB, Cr13/HF Trim, Raised Face
Lubricated Plug	PLG0803B1041RL-VM	Lubricated Plug Valve, 8", 300#, Bolted Bonnet, WCB, 410SS Trim, Viton Seals, Hardface Seats, Raised Face, Lever Operated
Dual Seal Plug	DSP0803B1011RG	Dual Seal Plug, 8", 300#, bolted Bonnet, WCB, Cr13/HF Trim, Raised Face, Gear Operated
Thru Conduit Gate	TCG0603B1036RG-VM	Thru Conduit Gate, 6", 300#, Bolted Bonnet, WCB, 316SS Trim, Viton Seals, Hardface Seats, Raised Face, Gear Operated
Expanding Gate	TCG0603B1036RGEX-VM	Thru Conduit Gate, 6", 300#, Bolted Bonnet, WCB, 316SS Trim, Viton Seals, Hardface Seats, Raised Face, Gear Operated, Expanding
Rising Stem Ball	RSB1006B1036RG-/R	Rising Stem Ball, 10", 600#, Bolted Bonnet, WCB Body, 316SS Trim, RPTFE Seats, Raised Face, Gear Operated

Note: Wedge Gates, Globes, Swing Checks, Piston Checks, Wafer Checks are metal-to-metal seats as standard.

# Technical Data for Optional Seal & Seat Selections

## Optional Seal Selections

Code	Material	Description
B	BUNA	Also called Buna N or Nitrile, this sealing material is widely used because of its compatability with most hydraulic fluid media, including petroleum oils, water, water glycol, Di-Ester based fluids, air, and inactive gases. The temperature of this material ranges from -54C to +135C (-65F to +275F).
N	NEOPRENE	This sealing material is excellent for refrigerants, amonia, and freon. Its temperature range is from -37C to +107C (-35F to +225F).
E	EPDM	Also called Ethylene-Propylene, this sealing material is recommended for low pressure steam, hot water, phosphate ester base fluid, weak alkalines, and acids. This material is not recommended for petroleum service, hydrocarbons, alcohol, and radiation. Its temperature range is -54C to 149C (-65F to +250F).
V	VITON	Also called Fluorocarbon Rubber (FKM), this material is known for being excellent in condition up to +204C (+400F). Viton offers excellent resistance to aggressive fuels and chemicals.
T	PTFE	Teflon has excellent resistance to a wide range of chemicals. It is excellent at pressures below 1500 PSI. It can withstand temperatures up to +204C(+400F).
R	NBR	NBR is typically resistant to mineral oil-based lubricants and greases, hydraulic fluids, hydrocarbons, and water. NBR is not resistant to polar solvents or chlorinated hydrocarbons. The material's temperature range is from -30C to +100C (-22F to +212F).
H	HNBR	HNBR is simply hydrogenated NBR. It is typically resistant to mineral oil-based lubricants and greases, hydraulic fluids, hydrocarbons, and water just like NBR. HNBR is more resistant to heat, o-zone, and aging than NBR. The material's temperature range is from -30C to +100C (-22F to +212F).
S	SILICONE	This material is capable of operating in a wide temperature range and has excellent resistance to o-zone, water, weathering, and aging. This material is generally not resistant to fuels, oils, steams, acids, or high pressures. This materials temperature range is from -65C to +250C (-85F to +482F).
F	FLUROSILICONE	This material is far more resistant to oils and fules than other silicones. The temperature range, however, is limited from -73C to +177C (-100F to +350F).
G	GRAPHOIL	Grafoil is chemically resistant to attack from nearly all organic and inorganic fluids with exception of highly oxidizing chemicals and highly concentrated oxidizing mineral acids. The material is good up to +538C (+1000F) as well as at cryogenic temperatures.
U	FLUORSINT	This material contains a mica filler and offers superb mechanical properties such as resistance to abrasion, wear, and extrusion. It is ideal for high pressure applications and offers low co-efficient of friction. Its temperature range is from -46C to +343C (-50F to +650F).

**Note:** Additional options available upon request


## Optional Seat Selections

Code	Material	Description
D	DEVLON	Devlon is a polyamide with additives which allow it to perform at -46C to +121C (-50F to +250F). This material covers a wide range of applications while having excellent wear poperties, low friction, and improved impact strength.
M-S	METAL (STELLITE)	Metal seats hardfaced with Stellite 6 are recommended for use in high temperature fluid and gas applications. The temperature range of the material allows it to get up to the maximum temperature of the valve body material.
M-TC	METAL (TUNGSTEN CARBIDE)	Metal seats hardfaced with Tungsten Carbide are recommended for use in high temperature fluid and gas applications. The temperature range of the material allows it to get up to the maximum temperature of the valve body material.
N	NYLON	Nylon is offered for high pressure applications. The material is ideal for use in high pressure air, oil, and other gas media but is not suitable for strong oxidizing agents. The temperature range of this material is -34C to +121C (-29F to +250F).
O	NOVA	This Teflon based product is filled with glass amorphous carbon powder and graphite. It has a lower thermal contraction-expansion than PTFE and is ideal for steam or thermal fluid applications up to +288C (+550F).
P	PEEK	Peek offers a unique combination of chemical, mechanical, and thermal properties. This material is excellent for high temperatures up to +260C (+500F).
T	TEFLON (VIRGIN PTFE)	PTFE is a fluorocarbon-based polymer. This material has excellent chemical resistance and co-efficient of friction. The material is not recommended for liquid alkalis and flourine. Its temperature range is good from -34C to +204C (-30F to +400F).
K	PCTFE	Kel-F is a fluorocarbon based polymer offering a unique combination of physical and mechanical characteristics such as non-flamability, chemical resistance, and near zero moisture absorbtion. The temperature range of this material is from -240C to +204C (-400F to +400F).
R	RPTFE	PTFE's mechanical properties are enhanced by adding a percentage of filler material to provide improved strength, stability, and wear resistance. The temperature range of this material is -46C to +232C (-50F to +450F).

**Note:** Additional options available upon request


# Seal & Seat Pressure Temperature Chart

This chart depicts pressure and temperature ratings for common plastics and elastomers used in Southern California Valve products.

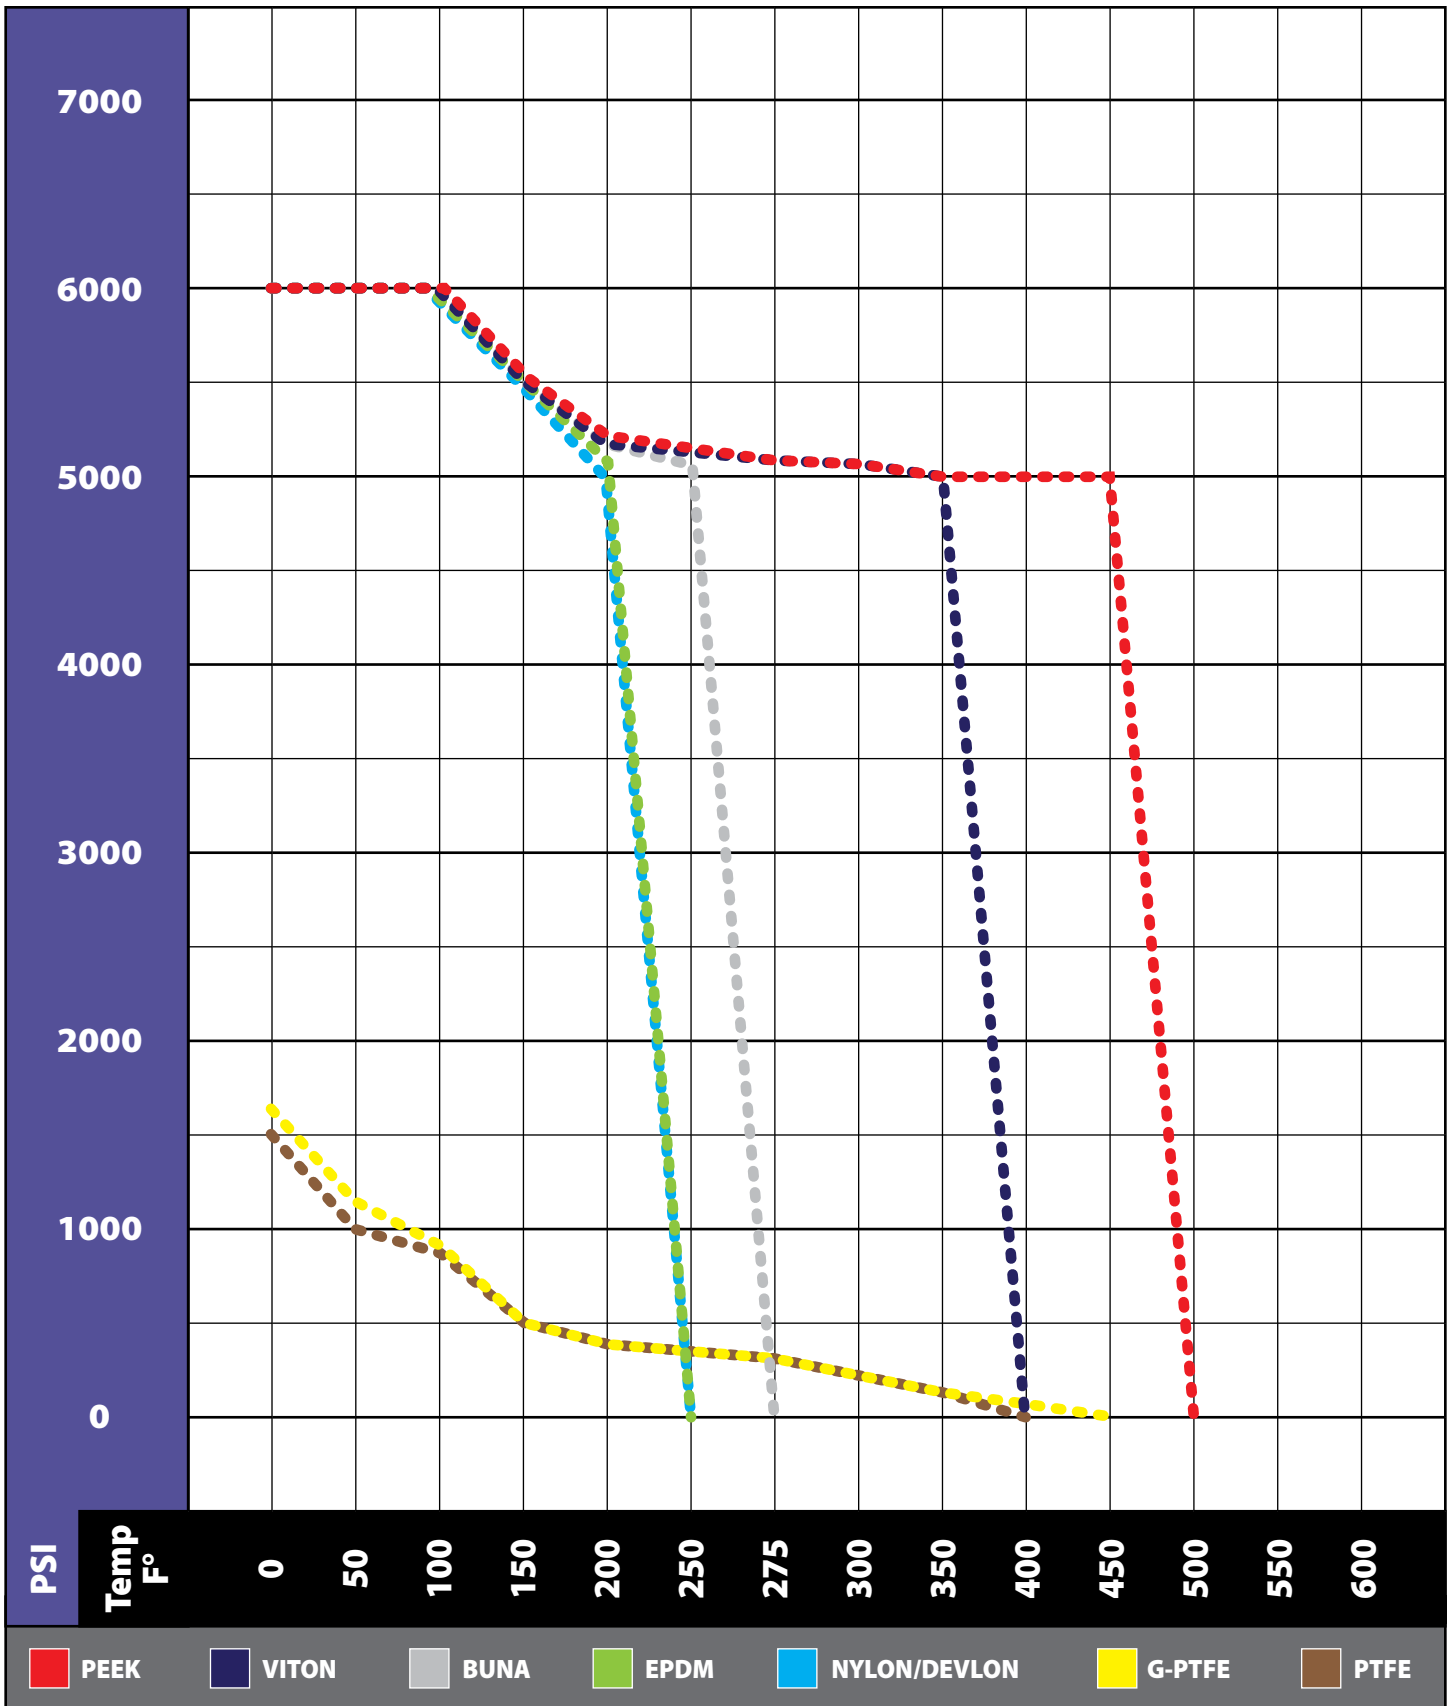

# Valve ID Tag & Valve Markings Identification


## Valve ID Tag

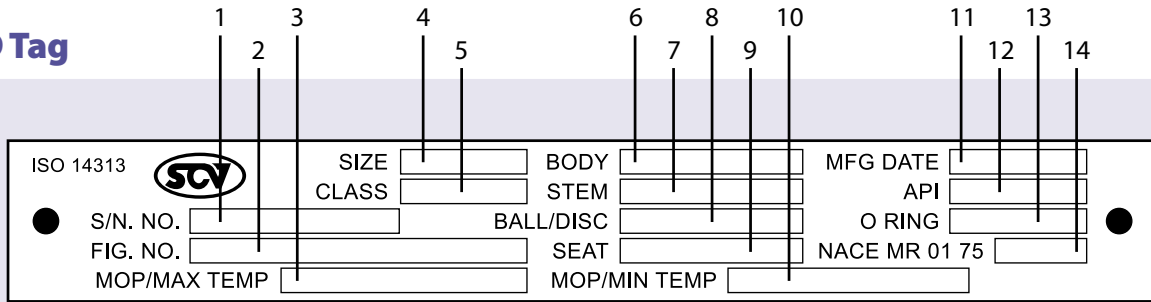

No.	Figure Number Code	Description
1	Serial Number	Identifies certified manufacturers serial number
2	Figure Number	Identifies the detailed valve configuration (valve type, bore size, pressure class, materials, etc.)
3	MOP/Max. Temp.	Identifies the maximum operating pressure in PSI and maximum operating temperature in Fahrenheit
4	Size	Identifies bore size
5	Pressure Class	Identifies pressure classifications per API requirements
6	Body Material	Identifies body metal material composition (A105, WCB, F51, CF8M, etc.)
7	Stem Material	Identifies stem material composition (A105, 410SS, 17-4pH, etc.)
8	Ball/Disc Material	Identifies ball/disc material composition (A105, 316SS, ENP, etc.)
9	Seat Material	Identifies seat material composition (PEEK, Teflon, Nylon, etc.)
10	API Conformance	Identifies API conformance (600, 6D, 6A, etc.)
11	Manufacturing Date	Identifies the date the valve manufacturing completion date
12	MOP/Min. Temp.	Identifies the maximum operating pressure in PSI and minimum operating temperature in Fahrenheit
13	O Ring	Identifies the O Ring material composition (Viton, Viton GLT, etc.)
14	NACE MR 01 75	Identifies corrosion resistance

## Valve Markings

No.	Valve ID Components
1	Tag
2	Brand
3	Size
4	Pressure Class
5	Body Material
6	Heat Number

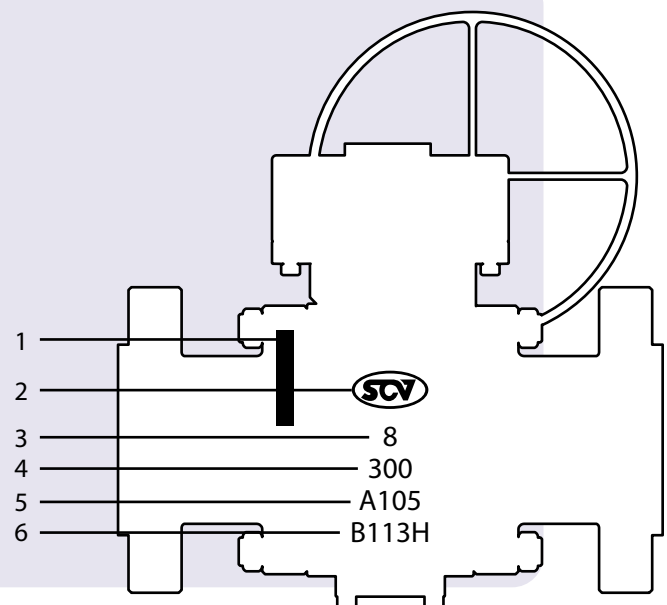

**Note:** SCV reserves the right to modify our products for improvement without prior notice.






Southern California Valve



## 3-Piece Trunnion Ball Valves - API 6D Bolted & Welded Body Construction Full & Reduced Port

Class: 150 - 2500/Sizes: 1" - 48"

Design and Manufacturing Standards	
Basic Design	API 6D
Shell Wall Thickness	API 6D
Face to Face Dimension	API 6D
Flange End Dimension	ANSI/ASME B16.5 (1" to 24") ANSI/ASME B16.47 (26" & up)
Butt-Weld End Dimension	ANSI/ASME B16.25
Inspection & Testing	API 6D
Fire Safe Design	API 607/BS 6755

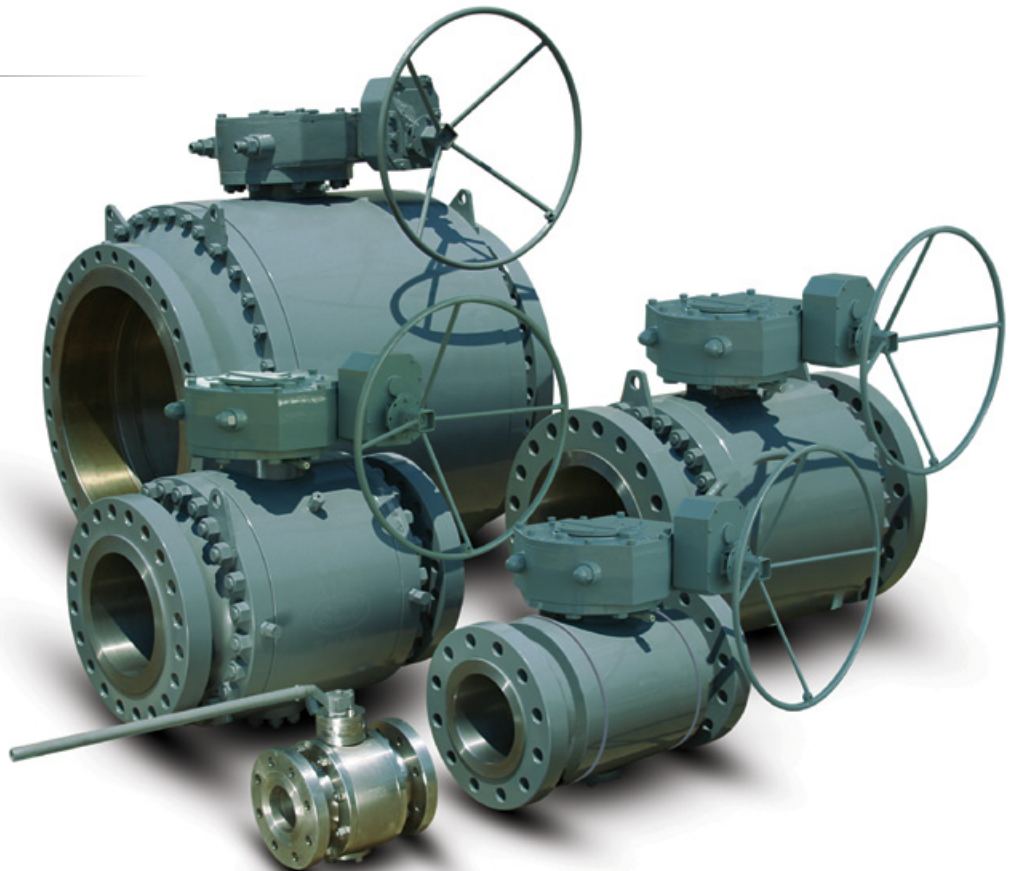

# 3-Piece Trunnion Ball Valves - API 6D


## Full & Reduced Port

## Bolted & Welded Body Construction


[ Expanded View ]

### Bolted Body Construction

#### Model I

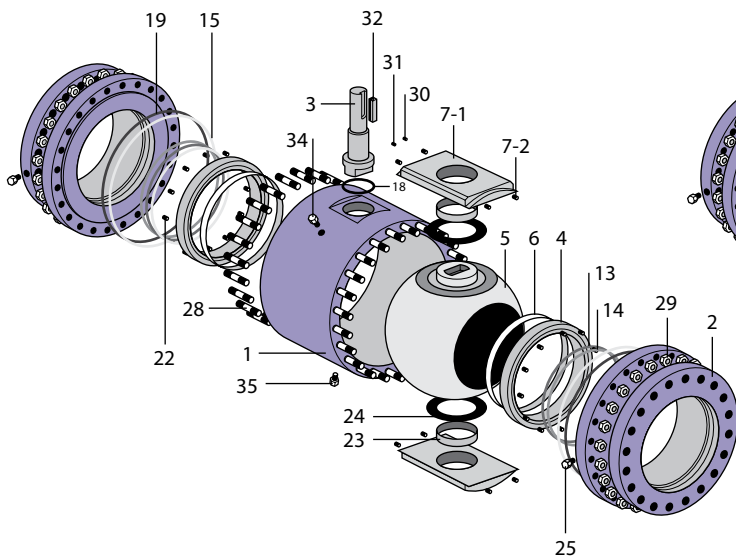


#### Model E

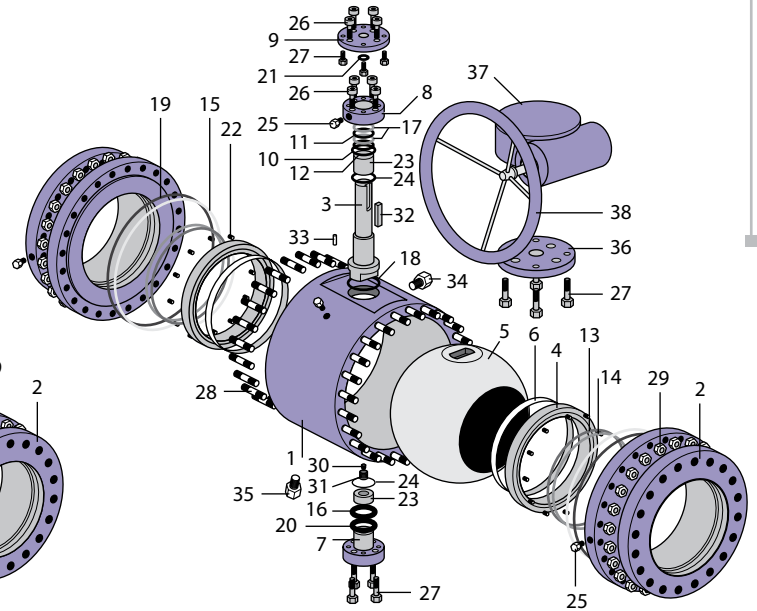


### Welded Body Construction

#### Model I

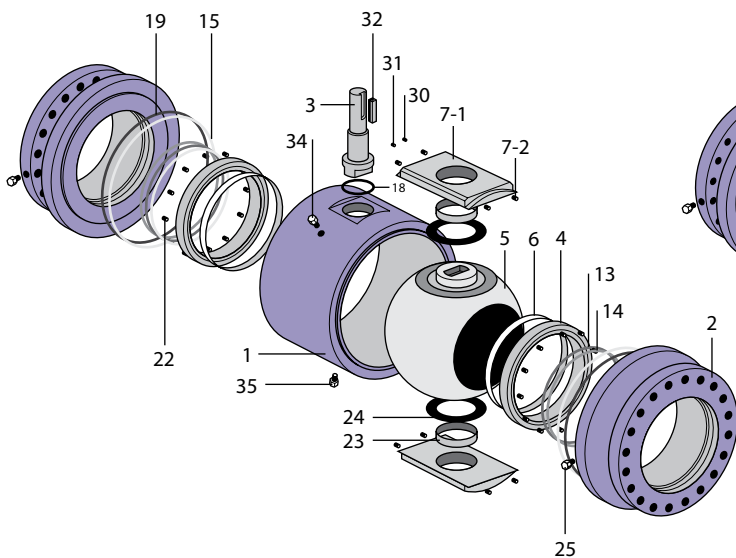

#### Model E

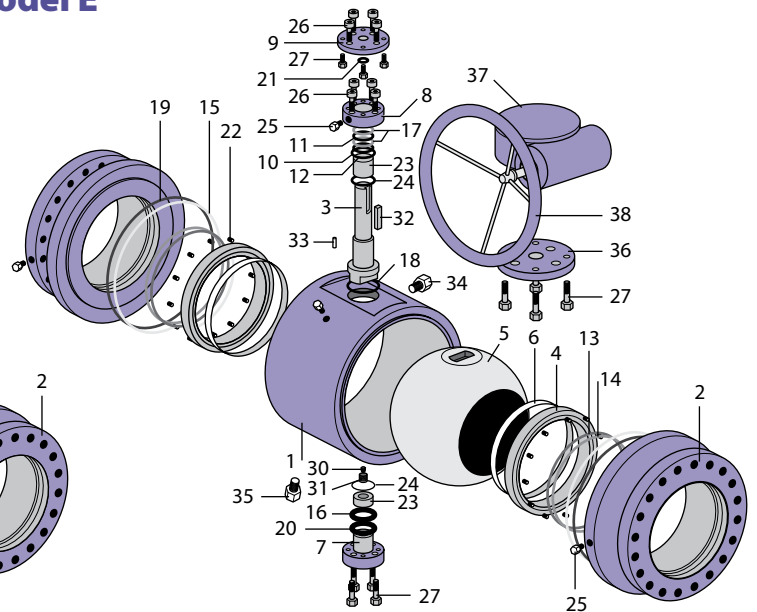

# 3-Piece Trunnion Ball Valves - API 6D

## Full & Reduced Port

### Bolted & Welded Body Construction

[ Bill of Materials ]

No	Name Of Part	Materials	
1	Body	A350 LF2	A182 F316
2	Closure	A350 LF2	A182 F316, A351, CF8M
3	Stem	A350 LF2+ENP	316 SS, 17-4 PHSS, 410 SS
4	Seat Ring	A350 LF2+ENP	316 SS, 410 SS
5	Ball	A350 LF2+ENP	A182F316, A351, CF8M, 410 SS
6	Seat Insert	Devlon, Nylon, PEEK, RTFE	
7	Trunnion	A350 LF2	316 SS, 410 SS
7-1	Trunnion Block	A350 LF2	316 SS, 410 SS
7-2	Trunnion Block Pin	410 SS	316 SS, 410 SS
8	Gland	A350 LF2	316 SS, 410 SS
9	Adapter Plate	A350 LF2	316 SS, 410 SS
10	Stem O-ring/ Lipseal	Low Temp HNBR /Viton AED	
11	Stem O-ring	Low Temp HNBR /Viton AED	
12	Gland O-ring	Low Temp HNBR /Viton AED	
13	Seat O-ring/Lipseal	Low Temp HNBR /Viton AED	
14	Seat Subseal	Low Temp HNBR /Viton AED	
15	Closure O-ring	Low Temp HNBR /Viton AED	
16	Trunnion O-ring	Low Temp HNBR /Viton AED	
17	Backup Ring	PTFE	
18	Gland Seal	Low Temp HNBR /Viton AED	
19	Body Seal	Low Temp HNBR /Viton AED	
20	Trunnion Seal	Low Temp HNBR /Viton AED	
21	Stem Packing	Graphite	
22	Seat Spring	Inconel X-750	
23	Bearing	PTFE, Carbon Steel	PTFE, 316SS
24	Thrust Washer	PTFE, Carbon Steel	PTFE, 316SS
25	Sealant Fitting	Carbon Steel, SS Ball Check	316SS, SS Ball Check
26	Socket Bolt	A320 L7M	A193 B8/B8M
27	Socket Cap Screw	A320 L7M	A193 B8/B8M
28	Stud Bolt	A320 L7M	A193 B8
29	Hex Nut	A194 7M	A194 8
30	Grounding Pin	Stainless Steel	
31	Grounding Spring	Inconel X-750	
32	Key	Carbon Steel	Stainless Steel
33	Dowel Pin	Carbon Steel	Stainless Steel
34	Relief Plug	Carbon Steel	Stainless Steel
35	Drain Plug	Carbon Steel	Stainless Steel
36	Mounting Plate	Carbon Steel	Stainless Steel
37	Gear Operator	Ductile Iron Case, Carbon Steel Worm Gear	
38	Hand Wheel	Carbon Steel, Ductile Iron	

**Note:** Materials also available in F321, F347, F51, F53, monel, inconel, incolloy and hastelloy. Metal-to-metal seated ball valve designs are available upon request.

**Note:** Additional materials available upon request.

\*= Used only in bolted body construction.

# 3-Piece Trunnion Ball Valves - API 6D

## Bolted & Welded Body Construction

### Full & Reduced Port Design Features & Applications

SCV's standard ball valves have been designed to API's highest standards. Complete Split body & Fully welded design offers maximum protection against line pressure and thermal distortion with long life and trouble-free performance.

SCV is supplying its products to the Crude oil transport and processing, Power engineering, Water supply systems and Process Industries throughout the world.

#### Seal Feature

SCV ball valves are produced with spring-loaded seats. This spring load keeps the seat in contact with the ball even in absence of line pressure and makes very efficient seal at low line pressure. As line pressure increases, the seat area creates a piston effect which forces the seat against the ball, therefore a tight seal becomes effective. If the pressure is higher, the force exerted by the seat on the ball is increased by action of the pipeline pressure. Therefore, the higher the line pressure, the greater the piston action. Seats are available in PTFE, R-PTFE, NYLON or others upon request.

#### Self Lubrication

Self lubrication, low friction PTFE is used for stem bearings, stem seals, and body seats. NYLON or other low friction materials are used for seat inserts. Self lubricating seals and stem bearing give predictable operating torque for the life of the valve.

#### Fire Safe Construction with Secondary Metal Seat

SCV's ball valves have been fire tested and can be supplied to API 6FA and API 607. The soft seat inserts, irrespective of their materials, will possibly fail when subjected to sudden high temperature conditions. SCV provides a fire-safe design which may substantially prevent leakages through seals when damaged by high temperature. The function of the seats before and after the fire test is shown on the sketches. If the seat inserts are destroyed or burned out, a metal to metal seal is formed between the lower diameter of the seat and ball, while the seat to body seals, the stem packing and the end connections to body seals are designed to resist high temperature and will remain undamaged.

(Figures 1 & 2)

#### Trunnion Mounting

Trunnion mounted stems absorb the thrust from line pressure, preventing excess friction between the ball and seats, so even at full rated working pressure, operating torque stays low.

(Figure 3)

#### Body Vent and Drain

The body cavity may be vented in both open and closed state.

(Figure 4)

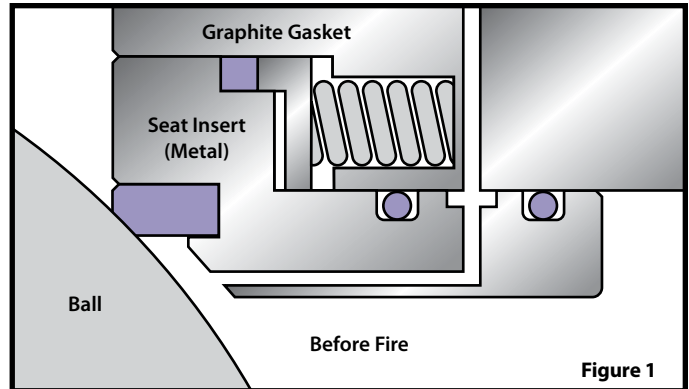


Figure 1

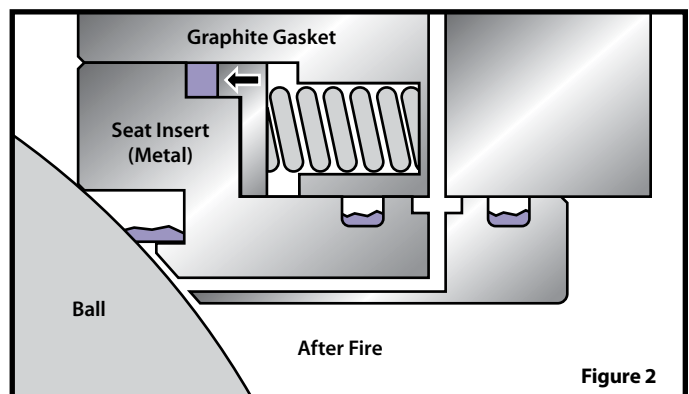


Figure 2

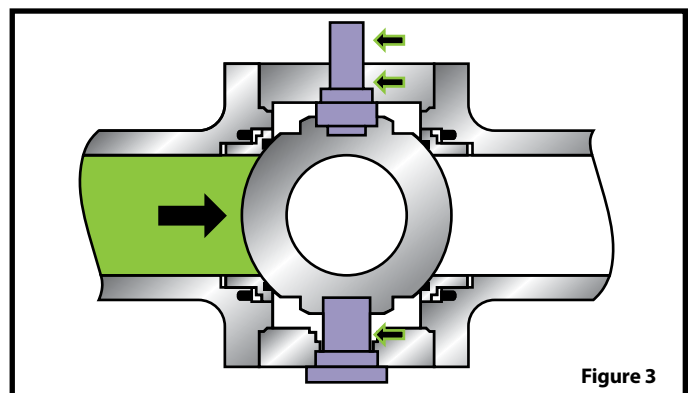


Figure 3

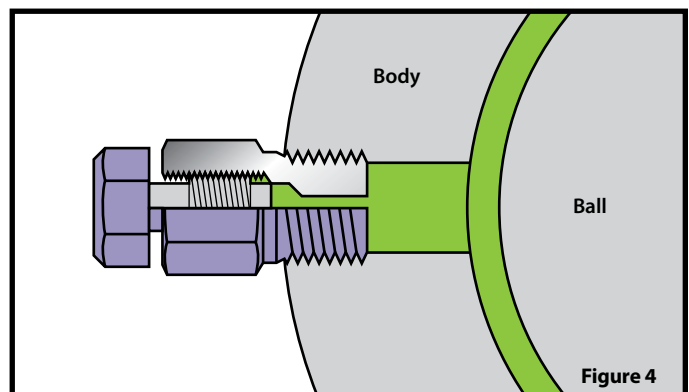


Figure 4



# 3-Piece Trunnion Ball Valves - API 6D

## Bolted & Welded Body Construction

### Full & Reduced Port Design Features & Applications

#### Double Block and Bleed

The seats are of both-side-sealing type, which means that they seal both on the upstream or downstream side of the ball valve and inside the valve. Whether in the open or closed position, pressure on each side of the ball is blocked from the body cavity by the seat rings engineered to self relieve. No pressure build up can occur in to body cavity. The body cavity can then be vented to the atmosphere or drained through the body port. **(Figure 5)**

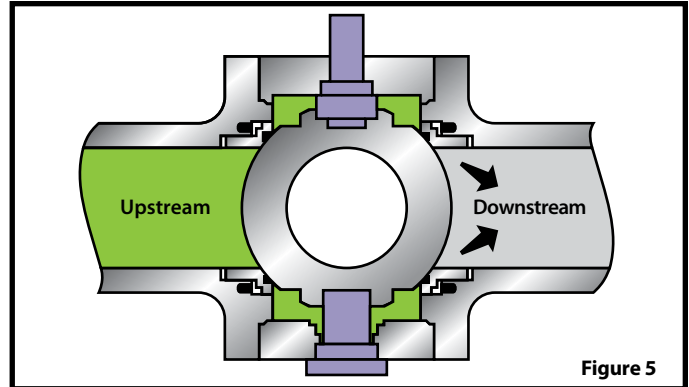


Figure 5

#### Sealant Fitting

Sealant lubrication fittings come as a standard with SCV's design. In the event of seat insert or stem seal damage, external or internal leakage can occur. Emergency sealant injection can save the integrity of the valve by incorporating a sealant seal around the stem or between the seat and the ball until such time the valve may be properly serviced. **(Figures 6, 7 & 8)**

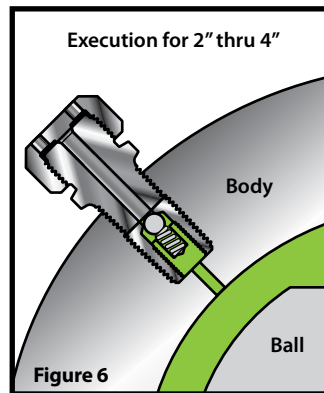


Figure 6

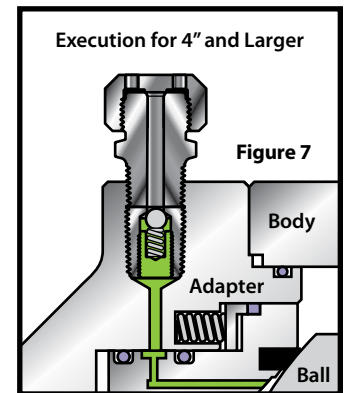


Figure 7

#### Antistatic Device

The springs provided at the stem allow the static charges to be led to the piping. In this way, an electrostatic charging of the ball is eliminated. **(Figure 9)**

#### Stem Seal with Blow Out Proof Stem

The stem is independent of the ball and is a blow-out proof design. As an integral part, a stem has a flange at its lower side. The stem flange prevents the stem from blowing out. This feature also allows replacement of stem packing while the valve is under pressure. The torque is transmitted to the ball by a generously proportioned mating joint, hence the stem is not affected by the side thrust.

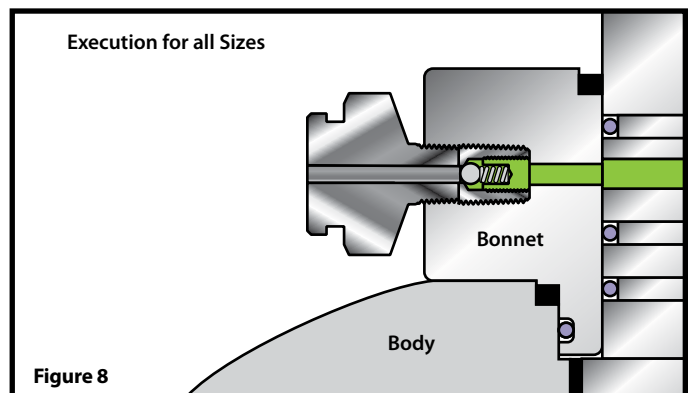


Figure 8


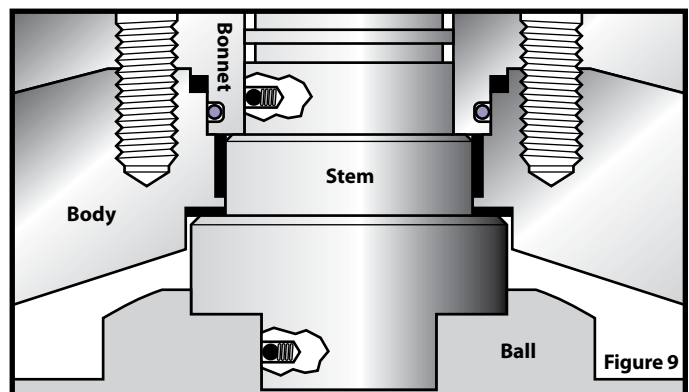


Figure 9

# 3-Piece Trunnion Ball Valves Full Port - API 6D

## Bolted & Welded Body Construction

### Size: 2" - 48" Class: 150

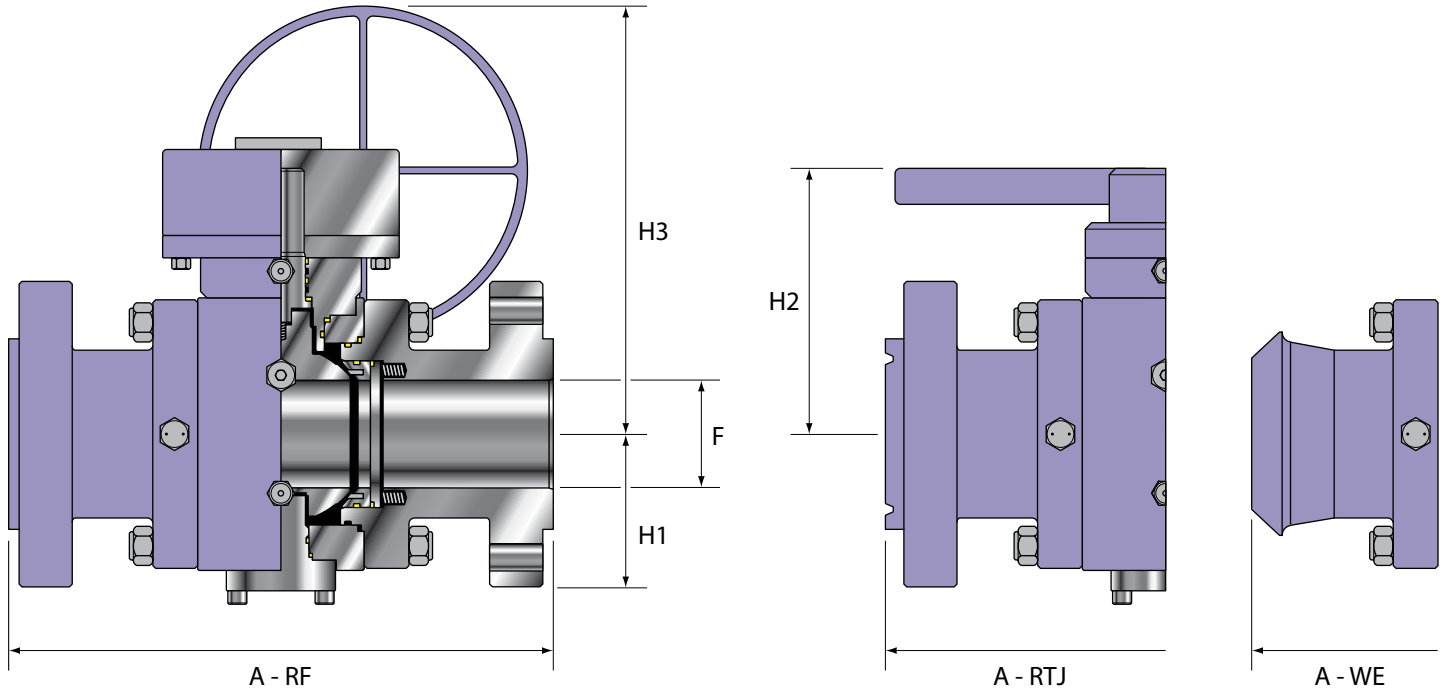


Size	Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
	F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
NPS 2 x 2*	2.00	7.00	7.50	8.50	4.44	6.50	8.90	39.6	28.6
DN 50 x 50	51	178	191	216	113	165	226	18	13
NPS 3 x 3*	3.00	8.00	8.50	11.125	5.56	8.69	11.09	68.2	52.8
DN 80 x 80	76	203	216	283	141	221	282	31	24
NPS 4 x 4*	4.00	9.00	9.50	12.00	6.50	9.56	11.96	118.8	94.6
DN 100 x 100	102	229	241	305	165	243	304	54	43
NPS 6 x 6	6.00	15.50	16.50	18.00	8.69	12.19	14.59	497.2	398.2
DN 150 x 150	152	394	419	547	221	310	371	226	181
NPS 8 x 8	8.00	18.00	18.50	20.50	10.38	14.80	17.20	748	646.8
DN 200 x 200	203	457	470	521	264	376	437	340	294
NPS 10 x 10	10.00	21.00	21.50	22.00	12.13	16.63	19.78	1196.8	1047.2
DN 250 x 250	254	533	546	559	308	422	502	544	476
NPS 12 x 12	12.00	24.00	24.50	25.00	13.88	18.69	21.84	1696.2	1546.6
DN 300 x 300	305	610	622	635	353	475	555	771	703
NPS 14 x 14	13.25	27.00	27.50	30.00	15.50	21.00	24.15	2343	2145
DN 350 x 350	337	686	699	762	394	533	613	1065	975
NPS 16 x 16	15.25	30.00	30.50	33.00	17.19	22.75	26.75	3042.6	2743.4
DN 400 x 400	387	762	775	838	437	578	680	1383	1247
NPS 18 x 18	17.25	34.00	34.50	38.00	18.75	25.75	29.80	4389	3940.2
DN 450 x 450	438	864	876	965	476	654	757	1995	1791
NPS 20 x 20	19.25	36.00	36.50	39.00	20.50	27.05	32.50	5288.8	4789.4
DN 500 x 500	489	914	927	991	521	687	826	2404	2177
NPS 24 x 24	23.25	42.00	42.50	45.00	24.38	32.80	36.67	8681.2	7933.2
DN 600 x 600	591	1067	10080	1143	619	833	931	3946	3606
NPS 26 x 26	25.00	45.00	45.50	49.00	34.83	50.00	55.91	10476.4	9429.2
DN 650 x 650	635	1143	1156	1247	885	1270	1420	4762	4286
NPS 28 x 28	27.00	49.00	49.50	53.00	36.40	52.45	58.36	11974.6	10775.6
DN 700 x 700	686	1247	1257	1346	925	1332	1482	5443	4898
NPS 30 x 30	29.00	51.00	51.50	55.00	38.77	55.75	61.95	14966.6	13470.6
DN 800 x 800	737	1295	1308	1397	985	1416	1574	6803	6123
NPS 36 x 36	34.50	60.00	60.50	68.00	44.54	63.90	70.10	24945.8	22451
DN 900 x 900	876	1524	1537	1727	1131	1623	1781	11339	10205
NPS 42 x 42	34.50	60.00	60.50	68.00	44.54	63.90	70.10	24945.8	22451
DN 1050 x 1050	876	1524	1537	1727	1131	1623	1781	11339	10205
NPS 48 x 48	34.50	60.00	60.50	68.00	44.54	63.90	70.10	24945.8	22451
DN 1200 x 1200	876	1524	1537	1727	1131	1623	1781	11339	10205

\* = Lever operated

# 3-Piece Trunnion Ball Valves Reduced Port - API 6D

## Bolted & Welded Body Construction

### Size: 3" - 48" Class: 150

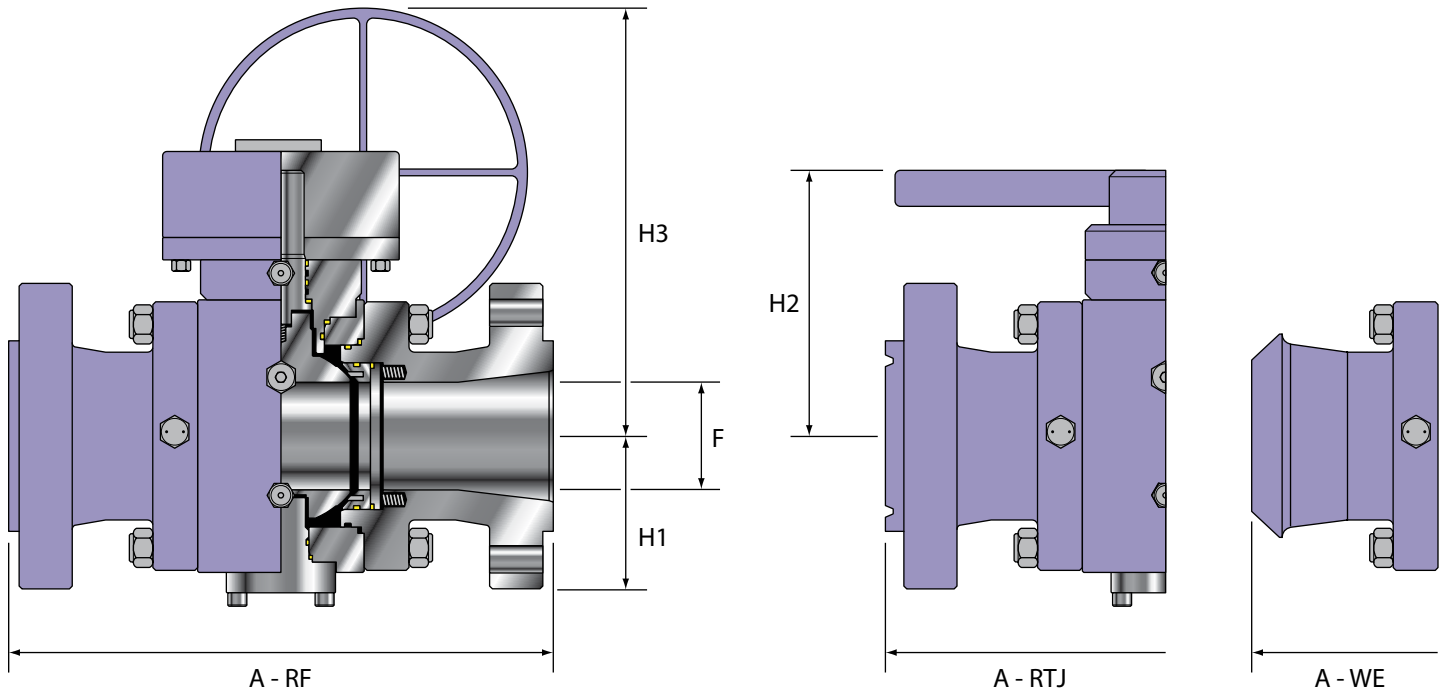


CLASS 150	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
	NPS	3 x 2*	2.00	8.00	8.50	11.125	5.22	7.28	9.68	48.4	33
	DN	80 x 50	51	203	216	283	133	185	246	22	15
	NPS	4 x 3*	3.00	9.00	9.50	12.00	6.34	9.47	11.87	88	74.8
	DN	100 x 80	76	229	241	305	161	241	301	40	34
	NPS	6 x 4*	4.00	15.50	16.00	18.00	7.28	10.34	12.74	149.9	118.8
	DN	150 x 100	102	394	406	457	185	263	324	68	54
	NPS	8 x 6	6.00	18.00	18.50	20.50	9.47	13.29	15.59	598.4	497.2
	DN	200 x 150	152	457	470	521	541	338	396	272	226
	NPS	10 x 8	8.00	21.00	21.50	22.00	11.16	15.90	18.30	847	748
	DN	250 x 200	203	533	546	559	283	404	465	385	340
	NPS	12 x 10	10.00	24.00	24.50	25.00	13.23	17.84	20.98	1496	1346.4
	DN	300 x 250	254	610	622	635	336	453	533	680	612
	NPS	14 x 12	12.00	27.00	27.50	30.00	14.98	20.00	23.04	1845.8	1645.6
	DN	350 x 300	305	686	699	762	380	508	585	839	748
	NPS	16 x 14	13.25	30.00	30.50	33.00	16.60	22.30	25.45	2593.8	2343
	DN	400 x 350	337	762	775	838	422	566	646	1179	1065
	NPS	18 x 16	15.25	34.00	34.50	38.00	18.39	24.05	28.05	3440.8	3093.2
	DN	450 x 400	387	864	876	965	467	611	712	1564	1406
	NPS	20 x 18	17.25	36.00	36.50	39.00	20.05	27.05	31.10	7139	4439.6
	DN	500 x 450	438	914	927	991	509	687	790	3245	2018
	NPS	24 x 20	19.25	42.00	42.50	45.00	21.90	28.80	33.90	5588	5137
	DN	600 x 500	489	1067	1079	1143	556	732	861	2540	2335
	NPS	30 X 24	23.25	50.98	/	55	21.06	/	26.1	7562	6731
	DN	600 x	591	1295	/	1397	535	/	663	3430	3053
	NPS	36 X 30	28.97	60.00	/	68.03	27.75	/	30.59	14220	12655
	DN	900 x 800	736	1524	/	1728	705	/	777	6450	5740
	NPS	42 X 36	34.48	73.03	/	82.00	37.00	/	43.03	30820	27430
	DN	1050 x 900	876	1855	/	2083	940	/	1093	13980	12442
	NPS	48 X 42	40.23	84.01	/	94.01	41.85	/	47.91	43982	39143
	DN	1200 x 1050	1022	2134	/	2388	1063	/	1217	19950	17755

\* = Lever operated

# 3-Piece Trunnion Ball Valves Full Port - API 6D

## Bolted & Welded Body Construction

### Size: 2" - 48" Class: 300

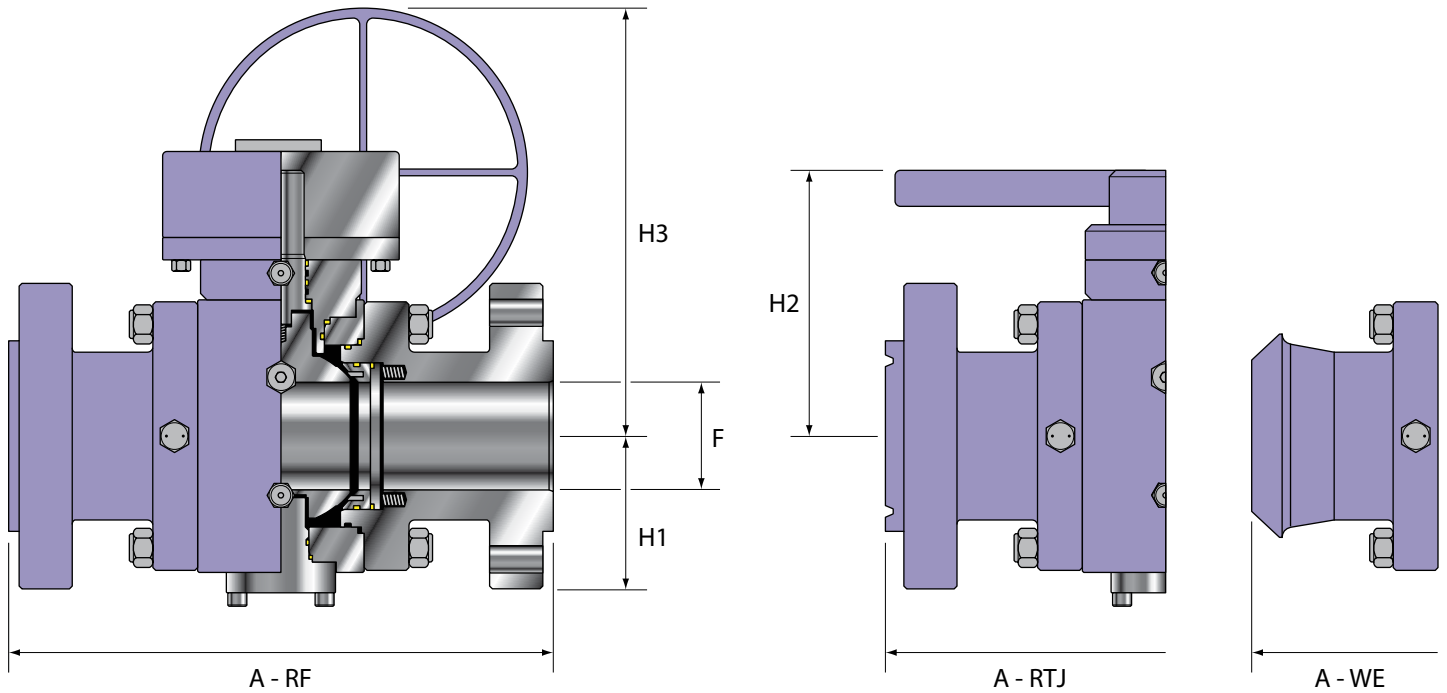

CLASS 300	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
NPS	2 x 2*		2.00	8.50	9.125	8.50	4.44	6.50	8.90	59.40	44
DN	50 x 50		51	216	232	216	113	165	226	27	20
NPS	3 x 3*		3.00	11.125	11.75	11.125	5.56	8.69	11.09	99	79.2
DN	80 x 80		76	283	299	283	141	221	282	45	36
NPS	4 x 4*		4.00	12.00	12.625	12.00	6.50	9.56	11.96	158.4	134.2
DN	100 x 100		102	305	321	305	165	243	304	72	61
NPS	6 x 6		6.00	18.00	16.50	18.00	8.69	12.19	14.59	547.8	468.6
DN	150 x 150		152	457	419	457	221	310	371	249	213
NPS	8 x 8		8.00	19.75	20.375	20.50	10.38	14.80	17.20	847	737
DN	200 x 200		203	502	518	521	264	376	437	385	335
NPS	10 x 10		10.00	22.375	23.00	22.00	12.13	16.63	19.78	1245.2	1075.8
DN	250 x 250		254	568	584	559	308	422	502	566	489
NPS	12 x 12		12.00	25.50	26.125	25.00	13.88	18.69	21.84	1894.2	1705
DN	300 x 300		305	648	664	635	340	475	555	861	775
NPS	14 x 14		13.25	30.00	30.625	30.00	15.50	21.00	24.15	2593.8	2294.6
DN	350 x 350		337	762	778	762	394	533	613	1179	1043
NPS	16 x 16		15.25	33.00	33.625	33.00	17.19	22.75	26.75	3440.8	3093.2
DN	400 x 400		387	838	854	838	437	578	679	1564	1406
NPS	18 x 18		17.25	36.00	36.625	36.00	18.75	25.75	29.80	4987.4	4490.2
DN	450 x 450		438	914	930	914	476	654	757	2267	2041
NPS	20 x 20		19.25	39.00	39.75	39.00	20.50	27.05	32.50	5486.8	4987.4
DN	500 x 500		489	991	1010	991	521	687	826	2494	2267
NPS	24 x 24		23.25	45.00	45.875	45.00	24.38	32.80	36.67	9229	8430.4
DN	600 x 600		591	1143	1165	1143	619	833	931	4195	3832
NPS	26 x 26		25.00	49.00	50.00	49.00	34.83	50.00	55.91	11675.4	10476.4
DN	650 x 650		635	1245	1270	1245	885	1270	1420	5307	4762
NPS	28 x 28		27.00	53.00	54.00	53.00	36.40	52.45	58.36	13970	12573
DN	700 x 700		686	1346	1372	1346	925	1332	1482	6350	5715
NPS	30 x 30		29.00	55.00	56.00	55.00	38.77	55.75	61.95	16964.2	15265.8
DN	800 x 500		737	1397	1422	1397	985	1416	1574	7711	6939
NPS	36 x 36		34.50	68.00	69.125	68.00	44.54	63.90	70.10	25944.6	23350.8
DN	900 x 900		876	1727	1756	1727	1727	1623	1781	11793	10614
NPS	42 X 42		40.23	82.00	/	82.00	37.36	/	43.26	35935	32701
DN	1050 x 1050		1022	2083	/	2083	949	/	1099	16300	14833
NPS	48 X 48		45.98	85.43	/	94.01	42.63	/	53.3	53572	48751
DN	1200 x 1200		1168	2170	/	2388	1083	/	1354	24300	22113


\* = Lever operated



# 3-Piece Trunnion Ball Valves Reduced Port - API 6D

## Bolted & Welded Body Construction

### Size: 3" - 48" Class: 300

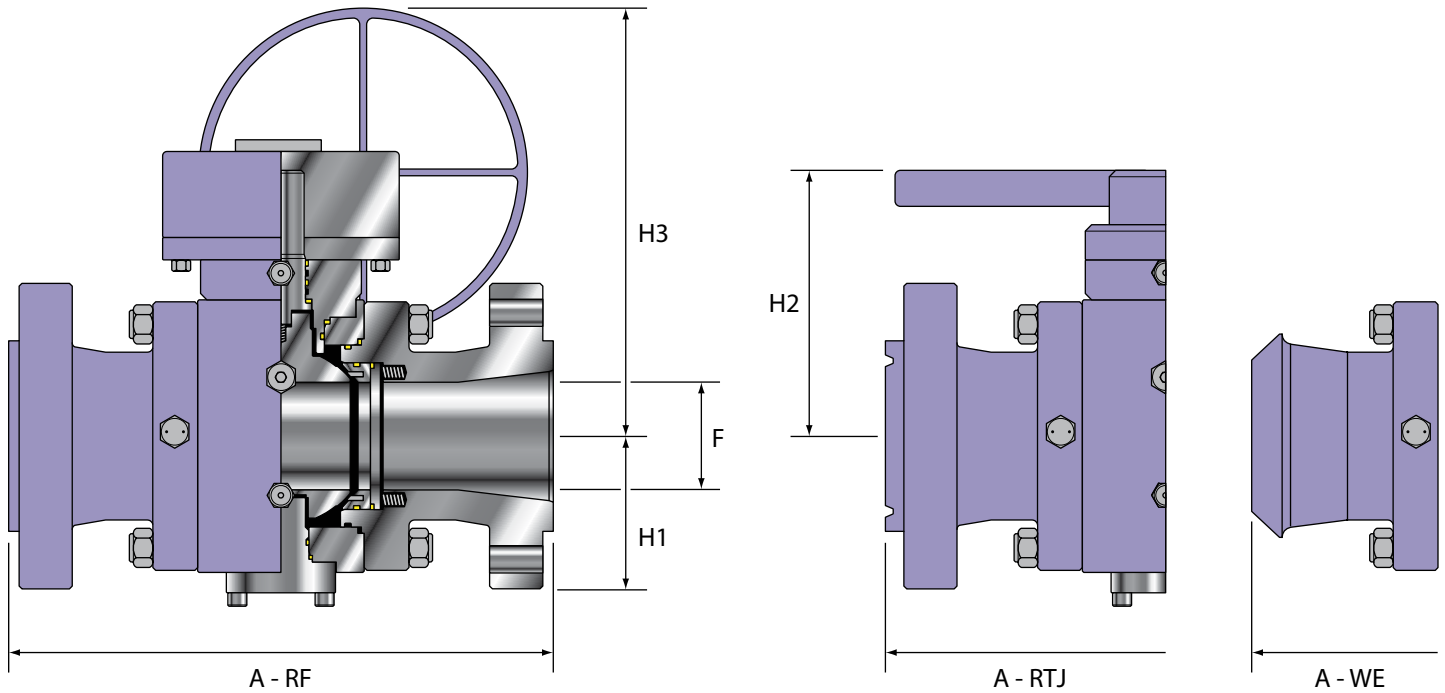


CLASS 300	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
NPS	3 x 2*		2.00	11.125	11.75	11.125	5.22	7.28	9.68	68.2	52.8
DN	80 x 50		51	283	299	283	133	185	279	31	24
NPS	4 x 3*		3.00	12.00	12.625	12.00	6.34	9.47	11.87	118.8	88
DN	100 x 80		76	305	321	305	161	241	301	54	40
NPS	6 x 4		4.00	15.875	16.50	18.00	7.28	10.34	12.74	217.8	178.2
DN	150 x 100		102	403	419	437	185	263	324	99	81
NPS	8 x 6		6.00	20.4	20.375	20.50	9.47	13.29	15.59	646.8	558.8
DN	200 x 150		152	518	518	521	241	338	396	294	254
NPS	10 x 8		8.00	22.375	23.00	22.00	11.16	15.90	18.30	897.6	776.6
DN	250 x 200		203	568	584	559	283	404	465	408	353
NPS	12 x 10		10.00	25.50	26.125	25.00	13.23	17.84	20.98	1645.6	1445.4
DN	300 x 250		254	648	664	635	336	453	533	748	657
NPS	14 x 12		12.00	30.00	30.625	30.00	14.98	20.00	23.04	1995.4	1795.2
DN	350 x 300		305	762	778	762	380	508	585	907	816
NPS	16 x 14		13.25	33.00	33.625	33.00	16.60	22.30	25.45	2893	2644.4
DN	400 x 350		337	838	854	838	422	566	646	1315	1202
NPS	18 x 16		15.25	36.00	36.625	36.00	18.39	24.05	28.05	3940.2	3542
DN	450 x 400		387	914	930	914	467	611	713	1791	1610
NPS	20 x 18		17.25	39.00	39.75	39.00	20.05	27.05	31.10	5288.8	4789.4
DN	500 x 450		438	991	1010	991	509	687	790	2404	2177
NPS	24 x 20		19.25	45.00	45.875	43.00	21.90	28.80	33.90	5915.8	5337.2
DN	600 x 500		489	1143	1165	1092	556	732	861	2698	2426
NPS	30 X 24		23.25	55	55.98	55	23.7	/	26.53	10207	9187
DN	800 x 600		591	1397	1422	1397	602	/	674	4630	4167
NPS	36 X 30		28.97	67.99	69.13	67.99	28.3	/	84.09	18365	16345
DN	900 x 800		736	1727	1756	1727	719	/	866	8330	7414
NPS	42 X 36		34.48	82	/	82.00	37.36	/	43.26	35935	32701
DN	1050 x 900		876	2083	/	2083	949	/	1099	16300	14833
NPS	48 X 42		40.23	85.43	/	94.01	42.63	/	53.3	53572	48751
DN	1200 x 1050		1022	2170	/	2388	1083	/	1354	24300	22113

\* = Lever operated

# 3-Piece Trunnion Ball Valves Full Port - API 6D

## Bolted & Welded Body Construction

### Size: 2" - 48" Class: 600

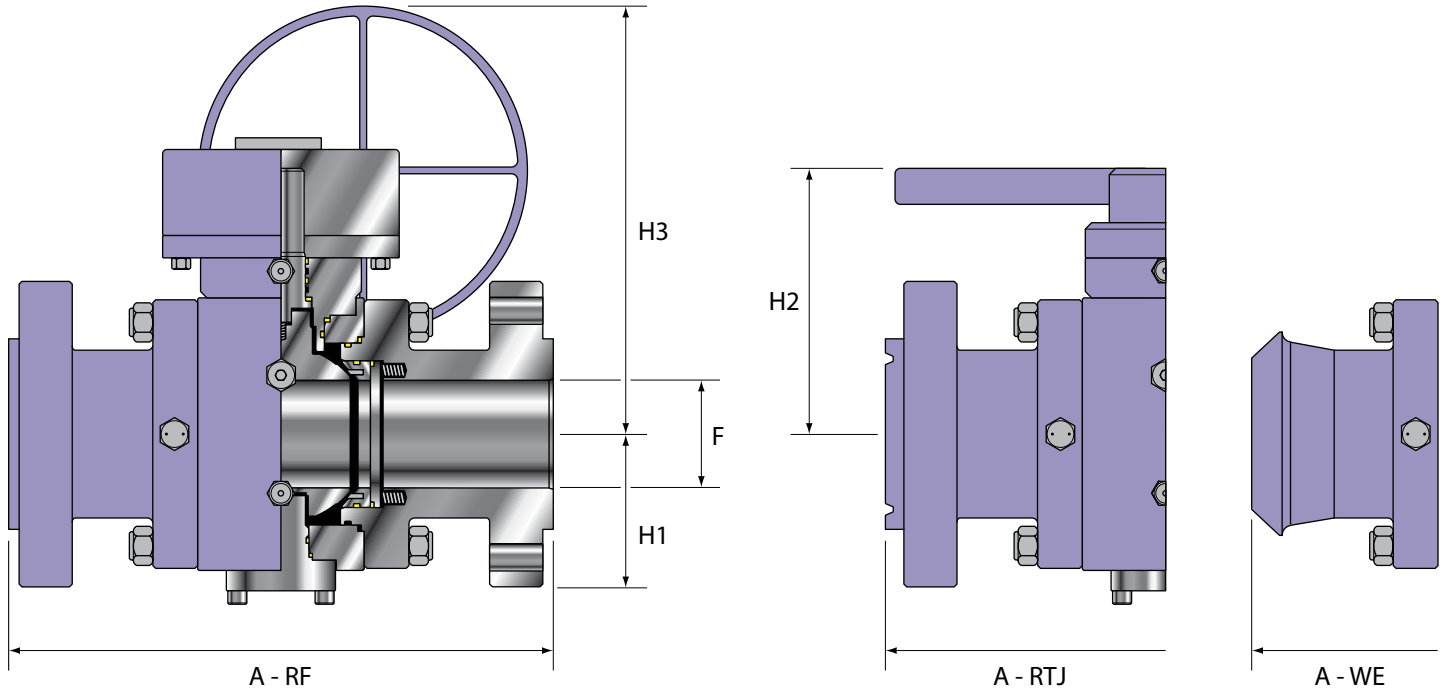


CLASS 600	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
NPS	2 x 2*		2.00	11.50	11.625	11.50	4.44	6.50	8.90	68.2	52.8
DN	50 x 50		51	292	295	292	113	165	226	31	24
NPS	3 x 3*		3.00	14.00	14.125	14.00	5.56	8.69	11.09	118.8	94.6
DN	80 x 80		76	356	359	356	141	221	282	54	43
NPS	4 x 4*		4.00	17.00	17.125	17.00	6.50	9.56	11.96	217.8	178.2
DN	100 x 100		102	432	435	432	165	243	304	99	81
NPS	6 x 6		6.00	22.00	22.125	22.00	8.69	12.19	14.59	598.4	497.2
DN	150 x 150		152	559	562	559	221	310	371	272	226
NPS	8 x 8		8.00	26.00	26.125	26.00	10.38	14.80	17.20	1196.8	976.8
DN	200 x 200		203	660	664	660	264	376	437	544	444
NPS	10 x 10		10.00	31.00	31.125	31.00	12.13	16.63	19.78	1696.2	1375
DN	250 x 250		254	787	791	787	308	422	502	771	625
NPS	12 x 12		12.00	33.00	33.125	33.00	13.88	18.69	21.84	2193.4	1775.4
DN	300 x 300		305	838	841	838	353	475	555	997	807
NPS	14 x 14		13.25	35.00	35.125	35.00	15.50	21.00	24.15	2943.6	2393.6
DN	350 x 350		337	889	892	889	394	533	613	1338	1088
NPS	16 x 16		15.25	39.00	39.125	39.00	17.19	22.75	26.75	4538.6	3740
DN	400 x 400		387	991	994	991	437	578	680	2063	1700
NPS	18 x 18		17.25	43.00	43.125	43.00	18.75	25.75	29.80	5876.2	4809.2
DN	450 x 450		438	1092	1095	1092	476	654	757	2671	2186
NPS	20 x 20		19.25	47.00	47.25	47.00	20.50	27.05	32.50	6635.2	5438.4
DN	500 x 500		489	1194	1200	1194	521	687	826	3016	2472
NPS	24 x 24		23.25	55.00	55.325	55.00	24.38	32.38	36.67	11523.6	10227.8
DN	600 x 600		591	1397	1405	1397	619	822	931	5238	4649
NPS	26 x 26		25.00	57.00	57.50	57.00	31.74	40.74	45.64	13670.8	11475.2
DN	650 x 650		635	1448	1461	1448	806	1035	1159	6214	5216
NPS	28 x 28		27.00	61.00	61.50	61.00	38.85	44.76	50.67	22451	20207
DN	700 x 700		686	1549	1562	1549	987	1137	1287	10205	9185
NPS	30 x 30		29.00	65.00	65.50	65.00	42.00	48.20	54.40	23949.2	21553.4
DN	750 x 750		737	1651	1664	1651	1067	1224	1382	10886	9797
NPS	36 x 36		34.50	82.00	82.625	82.00	47.34	53.54	59.74	37620	33827
DN	900 x 900		876	2083	2099	2083	1202	1360	1517	17100	15376
NPS	42 X 42		40.23	95.94	96.45	95.94	38.46	/	53.3	47598	42362
DN	1050 x 1050		1022	2437	2450	2437	977	/	1354	21590	19215
NPS	48 X 48		45.98	100.00	100.51	100.00	43.81	/	61.22	69556	63991
DN	1200 x 1200		1168	2540	2553	2540	1113	/	1555	31550	29026

\* = Lever operated

# 3-Piece Trunnion Ball Valves Reduced Port - API 6D

## Bolted & Welded Body Construction

### Size: 3" - 48" Class: 600

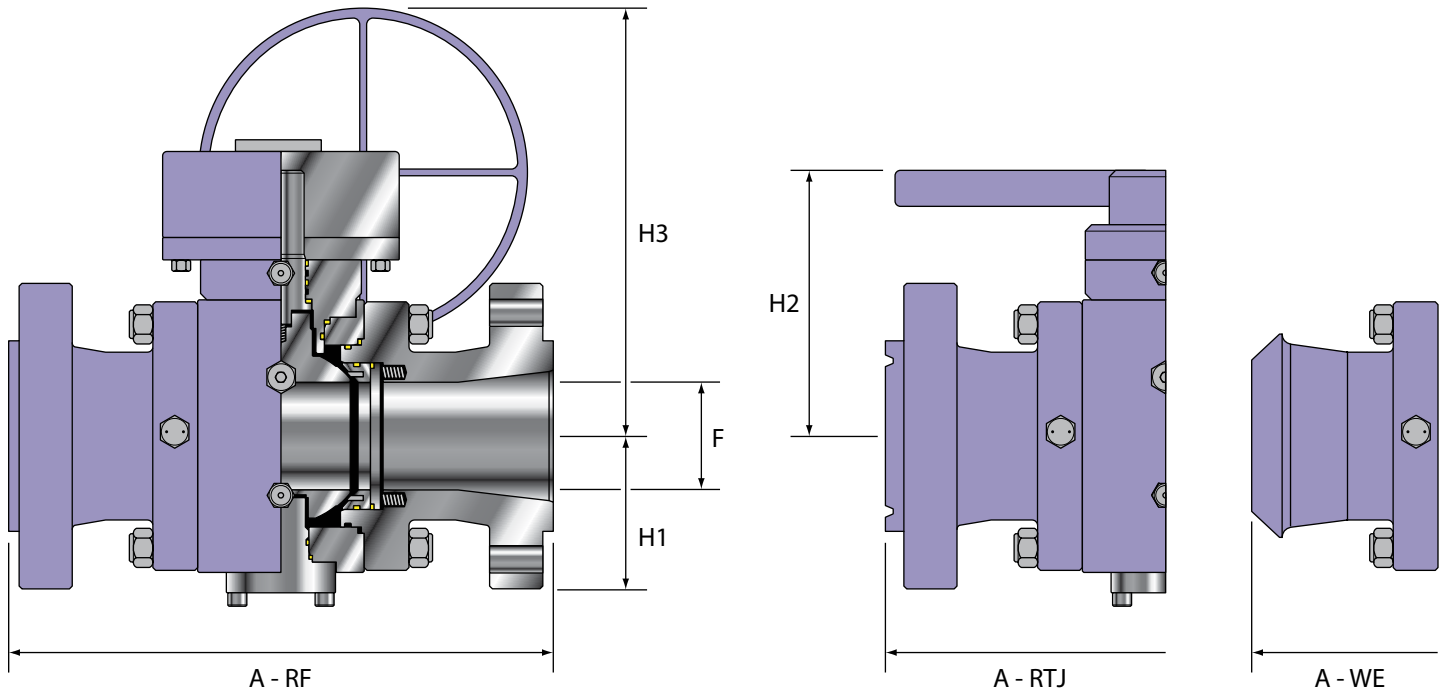


CLASS 600	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
NPS	3 x 2*		2.00	14.00	14.125	14.00	5.22	7.28	9.68	79.2	63.8
DN	80 x 50		51	356	359	356	133	185	279	36	29
NPS	4 x 3*		3.00	17.00	17.125	17.00	6.34	9.47	11.87	138.6	114.4
DN	100 x 80		76	432	435	432	161	241	301	63	52
NPS	6 x 4		4.00	22.00	22.125	22.00	7.28	10.34	12.74	299.2	248.6
DN	150 x 100		102	559	562	559	185	263	324	136	113
NPS	8 x 6		6.00	26.00	26.125	26.00	9.47	13.29	15.59	697.4	578.6
DN	200 x 150		152	660	664	660	241	338	396	317	263
NPS	10 x 8		8.00	31.00	31.125	31.00	11.16	15.90	18.30	1346.4	1075.8
DN	250 x 200		203	787	791	787	283	404	465	612	489
NPS	12 x 10		10.00	33.00	33.125	33.00	13.23	17.84	20.98	1894.2	1535.6
DN	300 x 250		254	838	841	838	336	453	533	861	698
NPS	14 x 12		12.00	35.00	35.125	35.00	14.98	20.00	23.04	2593.8	2145
DN	350 x 300		305	889	892	889	380	508	585	1179	975
NPS	16 x 14		13.25	39.00	39.125	39.00	16.60	22.30	25.45	3291.2	2743.4
DN	400 x 350		337	991	994	991	422	566	646	1496	1247
NPS	18 x 16		15.25	43.00	43.125	43.00	18.39	24.05	28.05	5088.6	4180
DN	450 x 400		387	1092	1095	1092	467	611	713	2313	1900
NPS	20 x 18		17.25	47.00	47.25	47.00	20.05	27.05	31.10	6536.2	5337.2
DN	500 x 450		438	1194	1200	1194	509	687	790	2971	2426
NPS	24 x 20		19.25	55.00	55.325	55.00	21.90	28.80	33.90	7383.2	6036.8
DN	600 x 500		489	1397	1405	1397	556	732	861	3356	2744
NPS	30 X 24		23.25	65.00	65.51	65.00	24.09	/	29.88	13030	11987
DN	800 x 600		591	1651	1664	1651	612	/	759	5910	5437
NPS	36 X 30		28.97	82.00	82.59	82.00	28.58	/	34.92	23281	21186
DN	900 x 800		736	2083	2098	2083	726	/	887	10560	9610
NPS	42 X 36		34.48	95.94	96.45	95.94	38.46	/	53.3	47598	42362
DN	1050 x 900		876	2437	2450	2437	977	/	1354	21590	19215
NPS	48 X 42		40.23	100.00	100.51	100.00	43.81	/	61.22	69556	63991
DN	1200 x 1050		1022	2540	2553	2540	1113	/	1555	31550	29026

\* = Lever operated

# 3-Piece Trunnion Ball Valves Full Port - API 6D

## Bolted & Welded Body Construction

### Size: 2" - 36" Class: 900

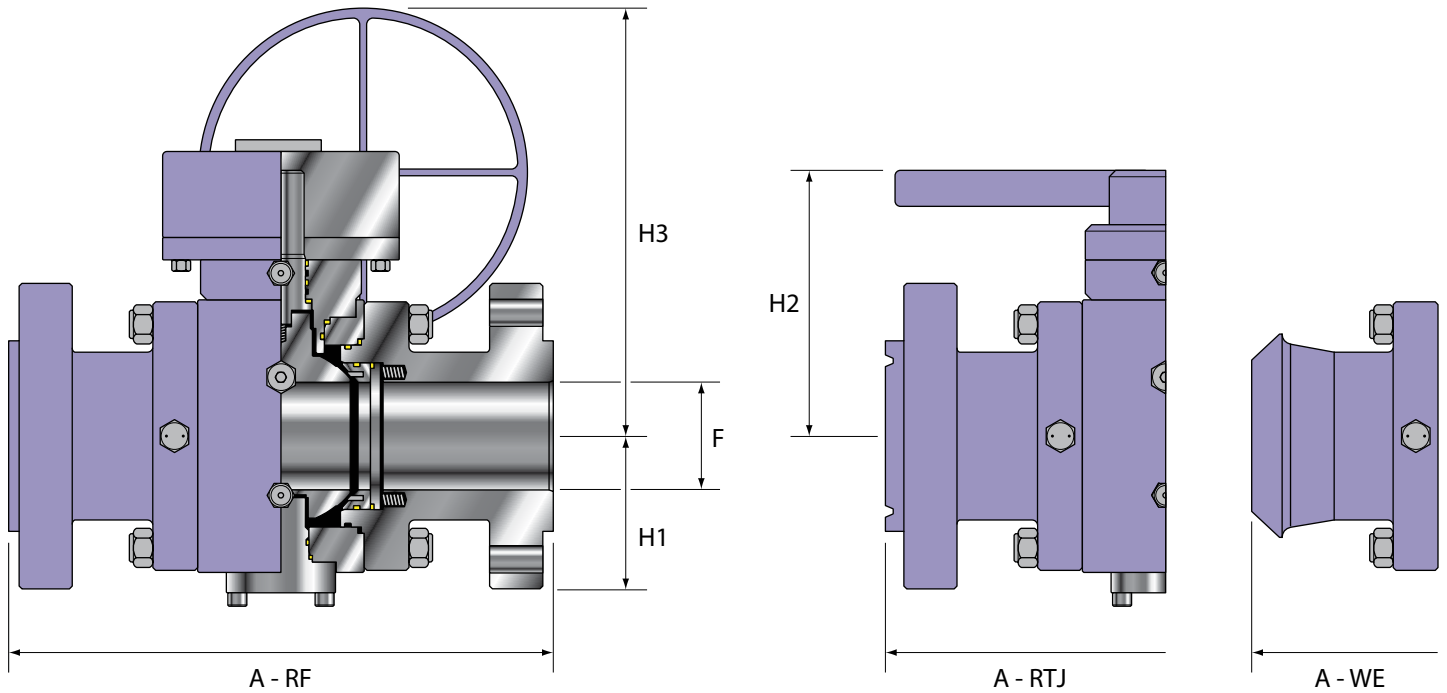

CLASS 900	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
	NPS	DN									
	2 x 2*	50 x 50	2.00	14.50	14.625	14.50	4.44	7.28	10.90	118.8	94.6
	3 x 3*	80 x 80	3.00	15.00	15.125	15.00	5.56	9.47	13.05	178.2	143
	4 x 4	100 x 100	4.00	18.00	18.125	18.00	6.50	10.34	13.92	319	224.4
	6 x 6	150 x 150	6.00	24.00	24.125	24.00	8.69	12.97	16.55	697.4	558.8
	8 x 8	200 x 200	8.00	29.00	29.125	29.00	10.38	15.58	19.10	1546.6	1236
	10 x 10	250 x 250	10.00	33.00	33.125	33.00	12.13	17.41	21.74	1846	1476
	12 x 12	300 x 300	12.00	38.00	38.125	38.00	13.88	19.47	23.80	2593	2343
	14 x 14	350 x 350	12.75	40.50	40.875	40.50	15.50	21.78	26.11	3841	3093
	16 x 16	400 x 400	14.75	44.50	44.875	44.50	17.19	23.53	28.71	4739	3791
	18 x 18	450 x 450	14.75	48.00	48.50	48.00	18.39	24.83	30.01	5438	4239
	20 x 20	500 x 500	18.625	52.00	52.50	52.00	20.50	28.30	34.46	10027.6	8032
	24 x 24	600 x 600	22.50	61.00	61.75	61.00	24.38	33.20	38.63	13372	10727
	30 x 30	750 x 750	28.11	74.01	74.88	74.01	31.06	/	41.18	27426	24410
	36 x 36	900 x 900	33.74	90.01	91.14	90.01	35.43	/	46.1	44423	40426


\* = Lever operated



# 3-Piece Trunnion Ball Valves Reduced Port - API 6D

## Bolted & Welded Body Construction

### Size: 3" - 42" Class: 900

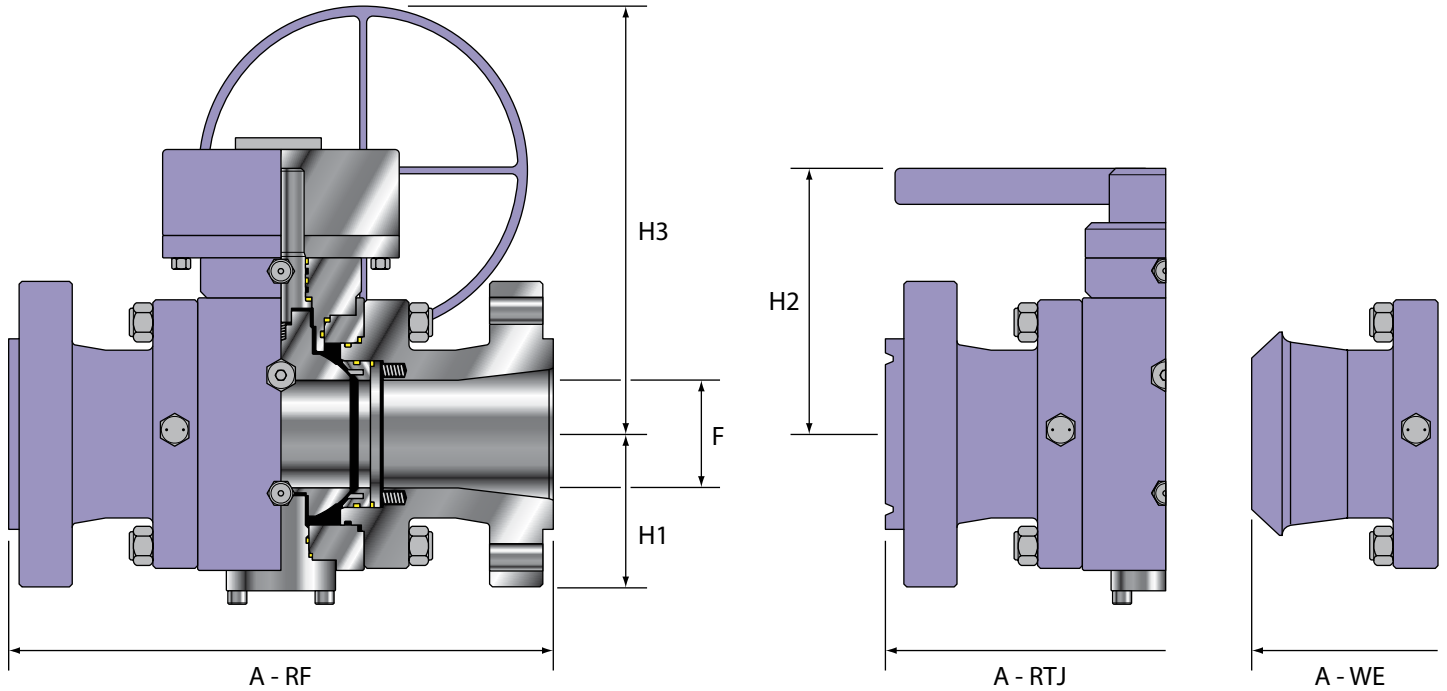


CLASS 900	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
NPS	3 x 2*		2.00	15.00	15.125	15.00	5.22	8.06	11.64	138.6	107.8
DN	80 x 50		51	381	384	381	133	205	296	63	49
NPS	4 x 3*		3.00	18.00	18.125	18.00	6.34	10.25	13.84	217.8	173.8
DN	100 x 80		76	457	460	457	161	260	352	99	79
NPS	6 x 4		4.00	24.00	24.125	24.00	7.28	11.12	14.70	437.8	347.6
DN	150 x 100		102	610	613	610	185	283	373	199	158
NPS	8 x 6		6.00	29.00	29.125	29.00	9.47	14.07	17.65	897.6	717.2
DN	200 x 150		152	737	740	737	241	357	448	408	326
NPS	10 x 8		8.00	33.00	33.125	33.00	11.16	16.68	20.26	1595	1276
DN	250 x 200		203	838	841	838	283	424	515	725	580
NPS	12 x 10		10.00	38.00	38.125	38.00	13.23	18.62	22.94	2295	1846
DN	300 x 250		254	965	968	965	336	473	583	1043	839
NPS	14 x 12		12.00	40.50	40.875	40.50	14.98	20.77	25.00	3392	2743
DN	350 x 300		305	1029	1038	1029	380	528	635	1542	1247
NPS	16 x 14		12.75	44.50	44.875	44.50	16.60	23.10	27.41	3991	3192
DN	400 x 350		337	1130	1140	1130	422	587	696	1814	1451
NPS	18 x 16		14.75	48.00	48.50	48.00	18.39	24.83	30.01	5438	4239
DN	450 x 400		387	1219	1231	1219	467	631	763	2472	1927
NPS	20 x 18		16.75	48.00	48.50	48.00	18.75	26.53	31.75	7031	5636
DN	500 x 450		438	1321	1334	1321	509	674	807	3878	3107
NPS	24 x 20		18.625	61.00	61.75	61.00	21.90	29.58	35.86	11436	9130
DN	600 x 500		489	1549	1569	1549	556	751	911	5198	4150
NPS	30 X 24		22.48	74.01	74.88	74.01	27.08	/	32.87	18232	16773
DN	750 x 600		571	1880	1902	1880	688	/	835	8270	7608
NPS	36 X 30		28.11	90.00	91.14	90.00	35.43	/	46.1	44423	40426
DN	900 x 750		714	2286	2315	2286	900	/	1171	20150	18337
NPS	42 X 36		33.74	105	106.14	105.00	41.73	/	48.03	52073	47388
DN	1050 x 900		857	2667	2696	2667	1060	/	1220	23620	21495

\* = Lever operated

# 3-Piece Trunnion Ball Valves Full Port - API 6D

## Bolted & Welded Body Construction

### Size: 1" - 36" Class: 1500

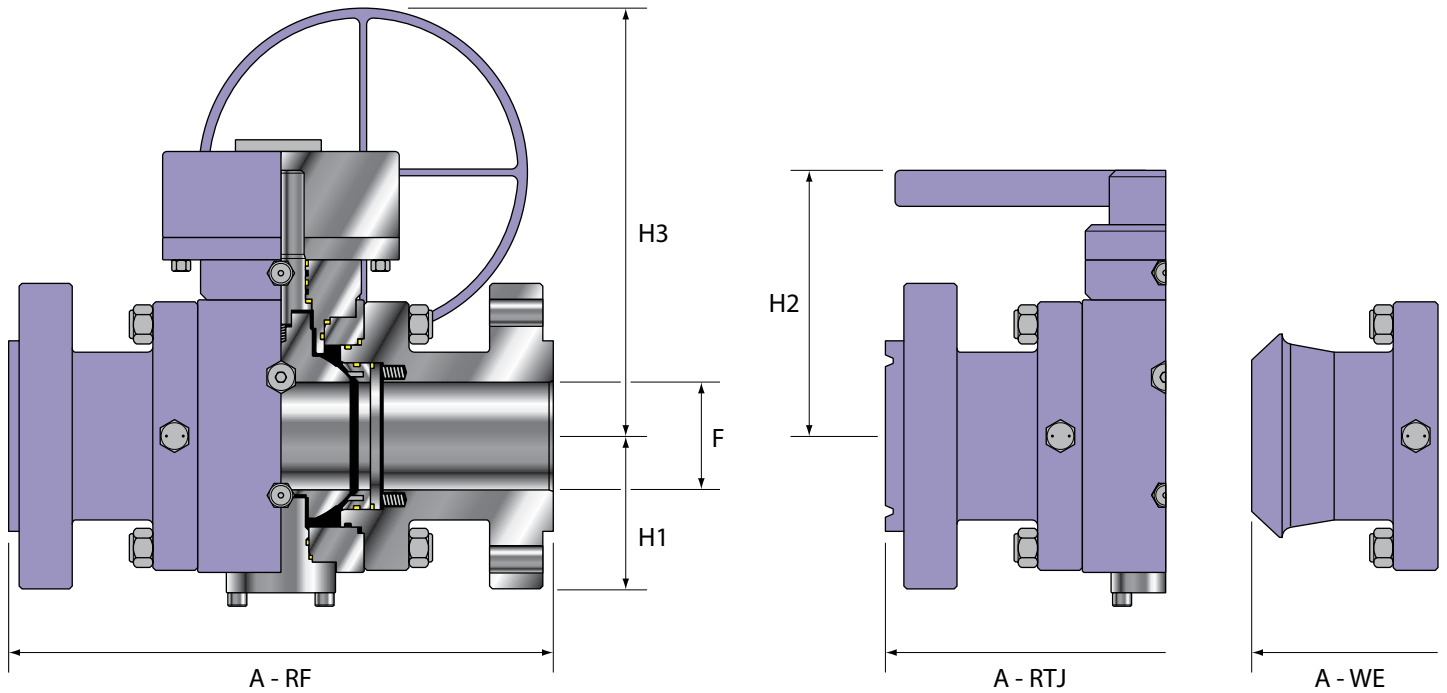


CLASS 1500	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
	NPS	1 x 1*	1.00	/	10.0	/	3.15	5.90	7.64	70	/
	DN	25 x 25	25	/	254	/	80	150	194	26	/
	NPS	1.5 x 1.5*	1.50	/	12	/	4	7.56	7.91	107	/
	DN	38 x 38	38	/	305	/	100	192	201	40	/
	NPS	2 x 2*	2.00	14.50	14.625	14.50	4.44	6.50	8.90	119	95
	DN	50 x 50	51	368	372	368	113	265	226	54	43
	NPS	3 x 3*	3.00	18.50	18.625	18.50	5.56	8.69	11.09	240	185
	DN	80 x 80	76	381	384	381	141	221	282	109	84
	NPS	4 x 4	4.00	21.50	21.625	21.50	6.50	9.56	11.96	420	280
	DN	100 x 100	102	457	460	457	165	243	304	191	127
	NPS	6 x 6	5.75	27.75	28.00	27.75	8.69	12.19	14.59	1190	900
	DN	150 x 150	152	610	613	610	221	310	371	541	409
	NPS	8 x 8	8.00	32.75	33.125	32.75	10.38	14.80	17.20	1936	1355
	DN	200 x 200	203	737	740	737	264	376	437	880	616
	NPS	10 x 10	10.00	39.00	39.375	39.00	12.13	16.63	19.78	3420	2394
	DN	250 x 250	254	838	841	838	308	422	502	1555	1088
	NPS	12 x 12	12.00	44.50	45.125	44.50	13.88	18.69	21.84	5120	3500
	DN	300 x 300	305	965	968	965	353	475	555	2327	682
	NPS	14 x 14	13.25	49.50	50.25	49.50	15.50	21.00	24.15	6259	4310
	DN	350 x 350	337	1029	1038	1029	394	533	613	2845	1959
	NPS	16 x 16	15.25	54.50	55.375	54.50	17.19	22.75	26.75	9210	7668
	DN	400 x 400	387	1130	1140	1130	437	578	680	4186	3485
	NPS	18 x 18	17.25	60.5	61.4	60.5	18.75	25.75	29.80	14260	11420
	DN	450 x 450	438	1219	1232	1219	467	654	757	6482	5191
	NPS	20 x 20	19.25	65.5	66.4	65.5	20.50	27.05	32.50	20550	17467
	DN	500 x 500	489	1321	1334	1321	521	687	826	9341	7940
	NPS	24 x 24	23.25	65.00	65.50	65.00	24.38	32.38	36.67	27590	23450
	DN	600 x 600	591	1549	1569	1549	619	823	931	12540	10660
	NPS	30 x 30	27.00	90.00	91.14	90.00	41.96	/	52.16	25596	23548
	DN	750 x 750	686	2286	2315	2286	1066	/	1325	11610	10681
	NPS	36 x 36	32.24	108.00	108.46	108.00	51.41	/	60.23	41535	37382
	DN	900 x 900	819	2743	2755	2743	1306	/	1530	18840	16956

\* = Lever operated

# 3-Piece Trunnion Ball Valves Reduced Port - API 6D

## Bolted & Welded Body Construction

### Size: 3" - 30" Class: 1500

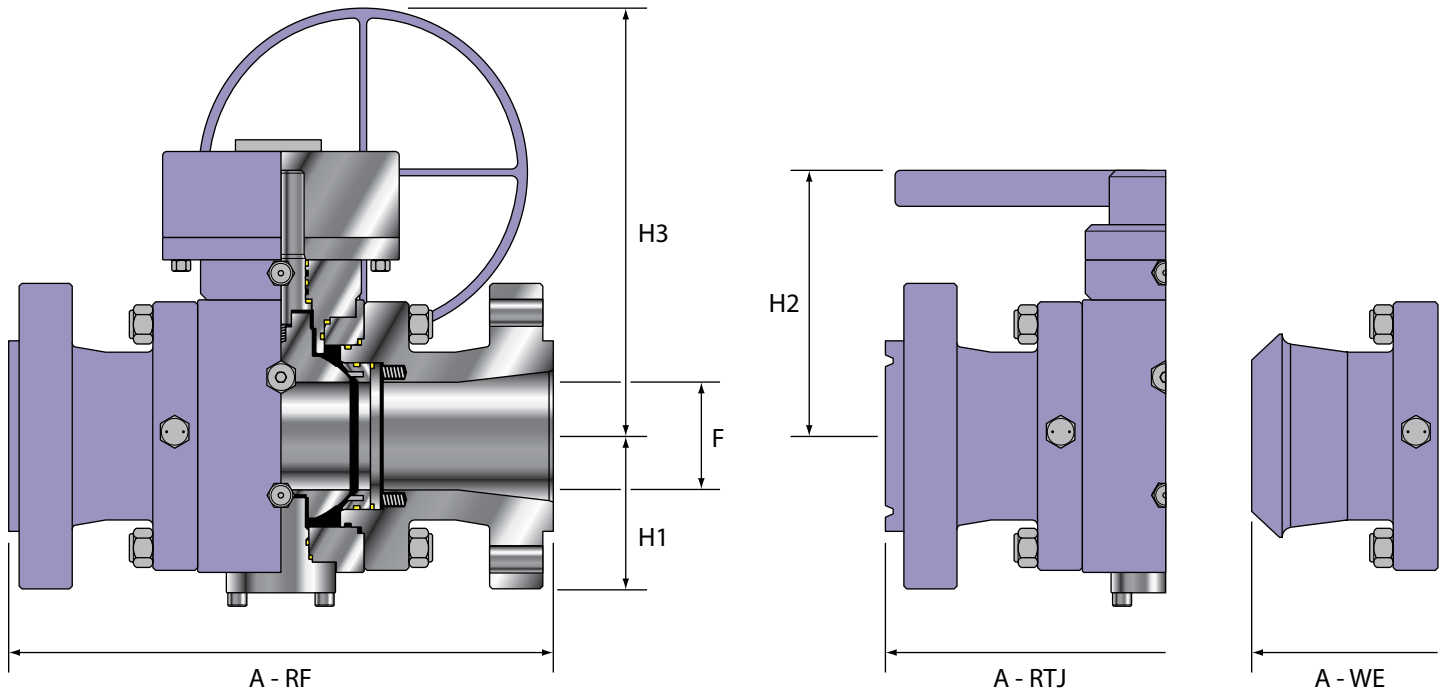


CLASS 1500	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
	NPS	3 x 2*	2.00	18.50	18.625	18.50	5.22	7.28	9.68	170	155
	DN	80 x 50	51	470	473	470	133	185	246	77	71
	NPS	4 x 3	3.00	21.50	21.625	21.50	6.34	9.47	11.87	320	265
	DN	100 x 80	76	546	549	546	161	241	301	145	120
	NPS	6 x 4	4.00	27.75	28.00	27.75	7.28	10.34	12.74	650	540
	DN	150 x 100	102	705	711	705	185	263	324	295	245
	NPS	8 x 6	6.00	32.75	33.125	32.75	9.47	13.29	15.59	1450	980
	DN	200 x 150	152	832	841	832	241	338	396	659	445
	NPS	10 x 8	8.00	39.00	39.375	39.00	11.16	15.90	18.30	2380	1666
	DN	250 x 200	203	991	1000	991	283	404	465	1082	757
	NPS	12 x 10	10.00	44.50	45.125	44.50	13.23	17.84	20.98	4070	2849
	DN	300 x 250	254	1130	1146	1130	336	453	533	1850	1295
	NPS	14 x 12	12.00	49.50	50.25	49.50	14.98	20.00	23.04	5741	4020
	DN	350 x 300	305	1257	1276	1257	381	508	585	2606	1827
	NPS	16 x 14	13.25	54.50	55.375	54.50	16.60	22.30	25.45	6678	5640
	DN	400 x 350	337	1384	1407	1384	422	566	646	2845	1959
	NPS	18 x 16	15.25	57.00	57.50	57.00	18.39	24.05	28.05	12180	9740
	DN	450 x 400	387	1448	1461	1448	467	611	712	5536	4427
	NPS	20 x 18	17.25	61.00	61.50	61.00	20.05	27.05	31.10	17360	14800
	DN	500 x 450	438	1549	1562	1549	509	687	790	7891	6727
	NPS	24 x 20	19.25	65.00	65.50	65.00	21.90	28.80	33.90	23820	19120
	DN	600 x 500	489	1651	1664	1651	556	732	861	10830	8690
	NPS	30 X 24	21.02	90.00	91.14	90.00	41.96	/	52.16	25596	23548
	DN	750 x 600	534	2286	2315	2286	1066	/	1325	11610	10681

\* = Lever operated

# 3-Piece Trunnion Ball Valves Full Port - API 6D

## Bolted & Welded Body Construction

### Size: 1" - 24" Class: 2500

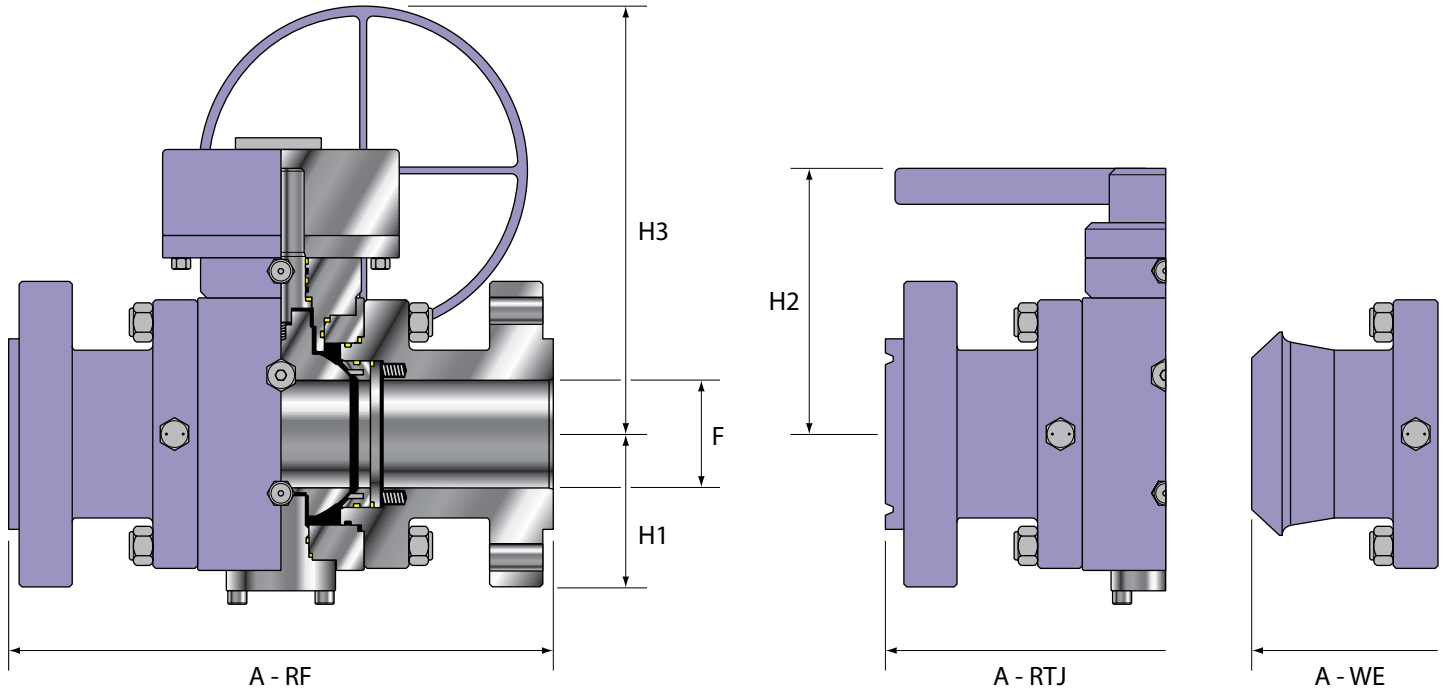


CLASS 2500	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
	NPS	1 x 1*	1.00	/	14.0	/	3.78	7.56	/	97	/
	DN	25 x 25	25	/	356	/	96	192	/	36	/
	NPS	1.5 x 1.5*	1.50	/	15.24	/	4.30	8.15	/	130	/
	DN	38 x 38	38	/	387	/	109	209	/	48	/
	NPS	2 x 2*	2.00	19.75	17.875	17.75	4.44	7.28	10.90	225	216
	DN	50 x 50	51	451	454	451	113	185	277	115	98
	NPS	3 x 3*	3.00	22.75	23.00	22.75	5.56	9.47	13.05	440	374
	DN	80 x 80	76	578	584	578	141	241	331	200	170
	NPS	4 x 4	4.00	26.50	26.875	26.50	6.50	10.34	13.92	825	701
	DN	100 x 100	102	673	682	673	165	263	354	370	314
	NPS	6 x 6	6.00	36.00	36.50	36.00	8.69	12.97	16.55	1790	1521
	DN	150 x 150	152	914	927	914	220	329	420	800	680
	NPS	8 x 8	8.00	40.25	40.875	40.25	10.38	15.58	19.10	3500	2975
	DN	200 x 200	203	1022	1038	1022	264	396	485	1600	1360
	NPS	10 x 10	10.00	50.00	50.875	50.00	12.13	17.41	21.74	5400	4590
	DN	250 x 250	254	1270	1292	1270	308	442	552	2500	2940
	NPS	12 x 12	12.00	56.00	56.875	56.00	13.88	19.47	23.80	8300	7055
	DN	300 x 300	305	1422	1444	1422	353	495	605	4000	3400
	NPS	14 x 14	12.75	57.00	57.875	57.00	15.50	21.78	26.11	12250	10020
	DN	350 x 350	337	1448	1470	1448	394	553	663	3560	4550
	NPS	16 x 16	14.75	58.00	58.875	58.00	17.19	23.53	28.71	16890	13510
	DN	400 x 400	387	1473	1495	1473	437	598	729	7670	6140
	NPS	18 x 18	16.75	59.00	59.875	59.00	18.75	26.53	31.75	21150	16920
	DN	450 x 450	438	1499	1521	1499	476	674	806	9610	7690
	NPS	20 x 20	18.625	60.00	60.875	60.00	20.50	28.30	34.46	24630	19690
	DN	500 x 500	489	1524	1546	1524	521	719	875	11195	8950
	NPS	24 x 24	22.50	61.00	61.75	61.00	24.38	33.20	38.63	29140	23310
	DN	600 x 600	591	1549	1568	1549	619	843	981	13245	10600

\* = Lever operated

# 3-Piece Trunnion Ball Valves Reduced Port - API 6D

## Bolted & Welded Body Construction

### Size: 3" - 24" Class: 2500

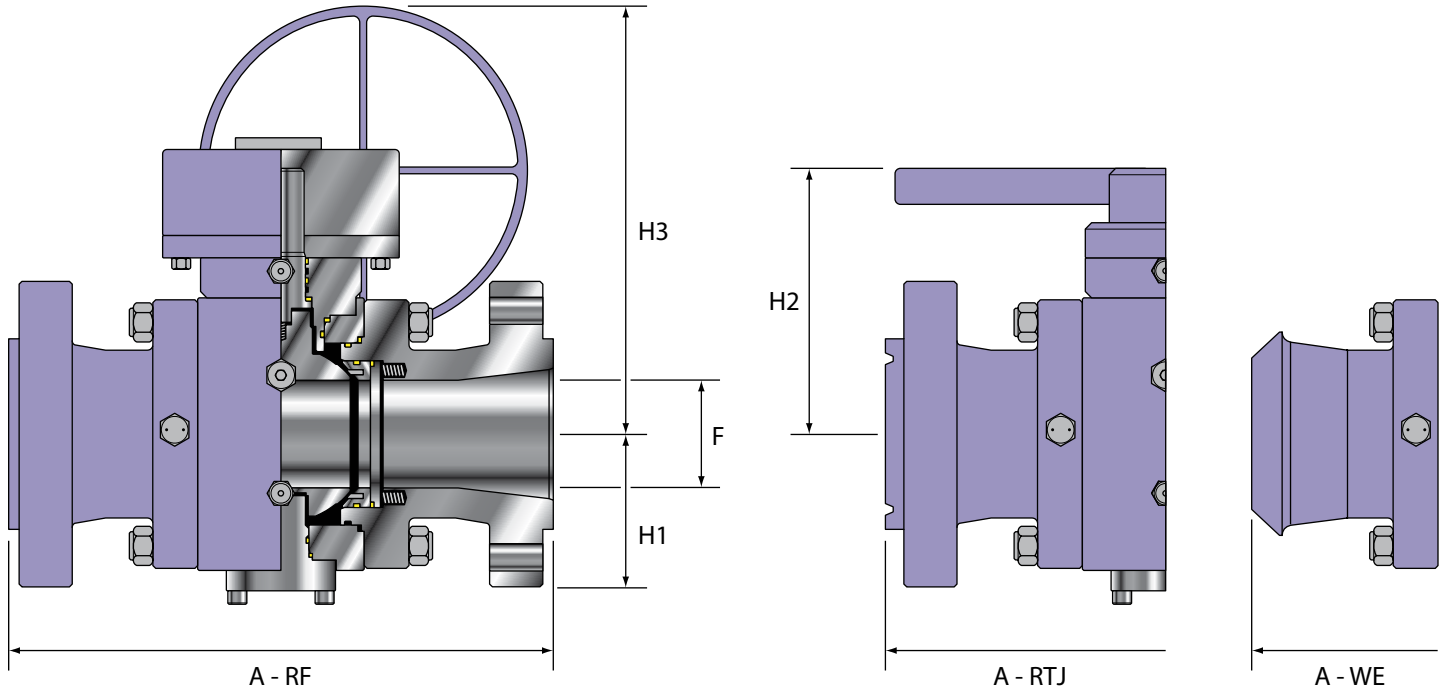

CLASS 2500	Size		Bore	End-to-End			Body Dimensions			FLG Weights	BW Weights
			F	A - RF	A - RTJ	A - WE	H1	H2	H3	LBS/KG	LBS/KG
	NPS	3 x 2*	2.00	22.75	23.00	22.75	5.22	8.06	11.64	305	260
	DN	80 x 50	50	51	578	584	578	133	205	296	120
	NPS	4 x 3	3.00	26.50	26.875	26.50	6.34	10.25	13.84	620	527
	DN	100 x 80	80	76	673	683	673	161	260	352	240
	NPS	6 x 4	4.00	36.00	36.50	36.00	7.28	11.12	14.70	1270	1080
	DN	150 x 100	102	914	927	914	185	282	373	373	490
	NPS	8 x 6	6.00	40.25	40.875	40.25	9.47	14.07	17.65	2630	2235
	DN	200 x 150	152	1022	1038	1022	241	357	448	1195	995
	NPS	10 x 8	8.00	50.00	50.875	50.00	11.16	16.68	20.26	4750	4030
	DN	250 x 200	203	1270	1292	1270	283	424	515	2160	1830
	NPS	12 x 10	10.00	56.00	56.875	56.00	13.23	18.62	22.94	6620	5620
	DN	300 x 250	254	1422	1445	1422	336	473	583	3010	2550
	NPS	14 x 12	12.00	57.00	57.875	57.00	14.98	20.77	25.00	9880	7900
	DN	350 x 300	305	1448	1470	1448	381	528	635	4990	3590
	NPS	16 x 14	12.75	58.00	58.875	58.00	16.60	23.10	27.41	14320	11450
	DN	400 x 350	337	1473	1495	1473	422	587	696	6510	3200
	NPS	18 x 16	14.75	59.00	59.875	59.00	18.39	24.83	30.01	19110	15280
	DN	450 x 400	387	1499	1521	1499	467	631	762	8690	6945
	NPS	20 x 18	16.75	60.00	60.875	60.00	20.05	27.83	33.05	22950	18360
	DN	500 x 450	438	1424	1546	1424	509	707	838	10430	8345
	NPS	24 x 20	18.625	61.00	61.75	61.00	21.90	29.58	35.86	27350	21880
	DN	600 x 500	489	1549	1568	1549	556	751	911	12431	9945

\* = Lever operated



# 3-Piece Trunnion Ball Valves - API 6D Full & Reduced Port Bolted & Welded Body Construction

## Flow Coefficients Cv Values & Operating Torques

### Flow Coefficients Cv Values

The Flow Coefficiency (Cv) of a valve is the rate of gallons per minute of water at 60° F through a fully opened valve at a pressure drop of 1 PSI across the valve.

Size			Class					
			150	300	600	900	1500	2500
IN	2 x 2	GPM	500	500	350	320	320	295
MM	50 x 50							
IN	3 x 2	GPM	220	220	190	185	180	295
MM	80 x 50							
IN	3 x 3	GPM	1390	1390	1000	910	820	735
MM	80 x 80							
IN	4 x 3	GPM	630	630	560	505	500	735
MM	100 x 80							
IN	4 x 4	GPM	2550	2550	1850	1760	1610	1450
MM	100 x 100							
IN	6 x 4	GPM	925	925	800	730	730	1450
MM	150 x 100							
IN	6 x 6	GPM	5249	5249	4400	4300	4080	2530
MM	150 x 150							
IN	8 x 6	GPM	2500	2500	2150	2010	2005	2530
MM	200 x 150							
IN	8 x 8	GPM	10750	10750	8450	8400	7980	5400
MM	200 x 200							
IN	10 x 8	GPM	500	5000	4500	4160	4150	5400
MM	250 x 200							
IN	10 x 10	GPM	17775	17775	14250	14160	13020	8430
MM	250 x 250							
IN	12 x 10	GPM	8400	8400	8000	7300	7280	8430
MM	300 x 250							
IN	12 x 12	GPM	26750	26750	22790	21230	16910	12345
MM	300 x 300							
IN	14 x 12	GPM	14080	14080	13990	13920	13810	12345
MM	350 x 300							
IN	14 x 14	GPM	32600	32600	28600	26600	24080	/
MM	350 x 350							
IN	16 x 14	GPM	14780	14780	14720	14690	/	/
MM	400 x 350							
IN	16 x 16	GPM	44700	44700	39250	36600	33110	/
MM	400 x 400							
IN	18 x 16	GPM	20840	20840	20750	20700	/	/
MM	450 x 400							
IN	18 x 18	GPM	58500	58500	52000	50540	50360	/
MM	450 x 450							
IN	20 x 18	GPM	28100	28100	27850	27840	/	/
MM	500 x 450							
IN	20 x 20	GPM	76000	76000	70500	69700	64750	/
MM	500 x 500							
IN	24 x 20	GPM	29000	29000	28750	26950	/	/
MM	600 x 500							
IN	24 x 24	GPM	113500	113500	99000	86750	77460	/
MM	600 x 600							
IN	26 x 26	GPM	/	/	/	/	/	/
MM	500 x 450							
IN	28 x 28	GPM	/	/	/	/	/	/
MM	500 x 500							
IN	30 x 30	GPM	/	/	/	/	/	/
MM	600 x 500							
IN	36 x 36	GPM	/	/	/	/	/	/
MM	600 x 600							

### Operating Torques

The operating torques are in foot pounds and are calculated based on soft seats, normal temperatures, and clean media.

Size			Class					
			150	300	600	900	1500	2500
IN	2 x 2	Ft. Lbs.	31	59	85	111	345	583
MM	50 x 50							
IN	3 x 2	Ft. Lbs.	31	59	85	111	345	583
MM	80 x 50							
IN	3 x 3	Ft. Lbs.	103	162	246	326	597	1025
MM	80 x 80							
IN	4 x 3	Ft. Lbs.	103	162	246	326	597	1025
MM	100 x 80							
IN	4 x 4	Ft. Lbs.	162	265	339	612	1106	2596
MM	100 x 100							
IN	6 x 4	Ft. Lbs.	162	265	339	612	1106	2596
MM	150 x 100							
IN	6 x 6	Ft. Lbs.	280	502	738	1387	2766	3806
MM	150 x 150							
IN	8 x 6	Ft. Lbs.	280	502	738	1387	2766	3806
MM	200 x 150							
IN	8 x 8	Ft. Lbs.	464	870	1475	2655	4057	5336
MM	200 x 200							
IN	10 x 8	Ft. Lbs.	464	870	1475	2655	4057	5336
MM	250 x 200							
IN	10 x 10	Ft. Lbs.	885	1564	2640	3894	5576	8273
MM	250 x 250							
IN	12 x 10	Ft. Lbs.	885	1564	2640	3894	5576	8273
MM	300 x 250							
IN	12 x 12	Ft. Lbs.	1220	1835	3976	5443	7228	11199
MM	300 x 300							
IN	14 x 12	Ft. Lbs.	1220	1835	3976	5443	7228	11199
MM	350 x 300							
IN	14 x 14	Ft. Lbs.	2060	3110	4809	6508	12920	/
MM	350 x 350							
IN	16 x 14	Ft. Lbs.	2060	3110	4809	6508	12920	/
MM	400 x 350							
IN	16 x 16	Ft. Lbs.	2769	4159	6408	8656	21299	/
MM	400 x 400							
IN	18 x 16	Ft. Lbs.	2769	4159	6408	8656	21299	/
MM	450 x 400							
IN	18 x 18	Ft. Lbs.	3753	6080	9844	13608	27892	/
MM	450 x 450							
IN	20 x 18	Ft. Lbs.	3753	6080	9844	13608	27892	/
MM	500 x 450							
IN	20 x 20	Ft. Lbs.	4724	8030	13642	19154	35888	/
MM	500 x 500							
IN	24 x 20	Ft. Lbs.	4724	8030	13642	19154	35888	/
MM	600 x 500							
IN	24 x 24	Ft. Lbs.	9068	14303	22779	31253	51482	/
MM	600 x 600							
IN	26 x 26	Ft. Lbs.	10323	16856	25472	/	/	/
MM	500 x 450							
IN	28 x 28	Ft. Lbs.	11577	19453	28164	/	/	/
MM	500 x 500							
IN	30 x 30	Ft. Lbs.	12833	22083	30833	/	/	/
MM	600 x 500							
IN	36 x 36	Ft. Lbs.	16917	26667	38000	/	/	/
MM	600 x 600							

# Pressure Temperature Ratings - ASME B16.34 - 2004 ■ ■ ■ ■ ■ ■ ■ ■ ■ ■

**Note:** Pressures in PSI

	Temp. F	A105	WCB	LF2	WCC	LCB	WC6	LCC	C5	C12	C12A	316	CF8M	F51	F53
	150	-20 to 100	285	285	285	290	265	290	290	290	290	290	275	275	290
200	260	260	260	260	260	255	260	260	260	260	260	235	235	260	260
300	230	230	230	230	230	230	230	230	230	230	230	215	215	230	230
400	200	200	200	200	200	200	200	200	200	200	200	195	195	200	200
500	170	170	170	170	170	170	170	170	170	170	170	170	170	170	170
600	140	140	140	140	140	140	140	140	140	140	140	140	140	140	140
650	125	125	125	125	125	125	125	125	125	125	125	125	125	125	125
700	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110
750	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95
800	80	80	80	80	80	80	80	80	80	80	80	80	80	/	/
850	65	65	65	65	65	65	65	65	65	65	65	65	65	/	/
900	50	50	50	50	50	50	50	50	50	50	50	50	50	/	/
950	35	35	35	35	35	35	35	35	35	35	35	35	35	/	/
1000	20	20	20	20	20	20	20	20	20	20	20	20	20	/	/
1050	/	/	/	/	/	/	20	/	20	20	20	20	20	/	/
1100	/	/	/	/	/	/	20	/	20	20	20	20	20	/	/
1150	/	/	/	/	/	/	20	/	20	20	20	20	20	/	/
1200	/	/	/	/	/	/	15	/	15	20	20	20	20	/	/
1250	/	/	/	/	/	/	/	/	/	/	/	20	20	/	/
1300	/	/	/	/	/	/	/	/	/	/	/	20	20	/	/
1350	/	/	/	/	/	/	/	/	/	/	/	20	20	/	/
1400	/	/	/	/	/	/	/	/	/	/	/	20	20	/	/
1450	/	/	/	/	/	/	/	/	/	/	/	20	20	/	/
1500	/	/	/	/	/	/	/	/	/	/	/	15	15	/	/
300	Temp. F	A105	WCB	LF2	WCC	LCB	WC6	LCC	C5	C12	C12A	316	CF8M	F51	F53
-20 to 100	740	740	740	740	750	695	750	750	750	750	750	720	720	750	750
200	680	680	680	680	750	660	750	750	750	750	750	620	620	745	745
300	655	655	655	655	730	640	720	730	730	730	730	560	560	665	665
400	635	635	635	635	705	615	695	705	705	705	705	515	515	615	615
500	605	605	605	605	665	585	665	665	665	665	665	480	480	580	580
600	570	570	570	570	605	550	605	605	605	605	605	450	450	555	555
650	550	550	550	550	590	535	590	590	590	590	590	440	440	545	545
700	530	530	530	530	555	510	570	555	570	570	570	435	435	540	540
750	505	505	505	505	505	475	530	505	530	530	530	425	425	530	530
800	410	410	410	410	410	390	510	410	510	510	510	420	420	/	/
850	320	320	320	320	320	300	485	320	485	485	485	420	420	/	/
900	230	230	230	230	225	200	450	225	375	450	450	415	415	/	/
950	135	135	135	135	135	135	320	135	275	375	385	385	385	/	/
1000	85	85	85	85	85	85	215	85	200	255	365	365	365	/	/
1050	/	/	/	/	/	/	145	/	145	170	360	160	160	/	/
1100	/	/	/	/	/	/	95	/	100	115	300	305	305	/	/
1150	/	/	/	/	/	/	65	/	60	75	225	235	235	/	/
1200	/	/	/	/	/	/	40	/	35	50	145	185	185	/	/
1250	/	/	/	/	/	/	/	/	/	/	/	145	145	/	/
1300	/	/	/	/	/	/	/	/	/	/	/	115	115	/	/
1350	/	/	/	/	/	/	/	/	/	/	/	95	95	/	/
1400	/	/	/	/	/	/	/	/	/	/	/	75	75	/	/
1450	/	/	/	/	/	/	/	/	/	/	/	60	60	/	/
1500	/	/	/	/	/	/	/	/	/	/	/	40	40	/	/

# Pressure Temperature Ratings - ASME B16.34 - 2004 ■■■■■■■■■■

**Note:** Pressures in PSI


600	Temp. F	A105	WCB	LF2	WCC	LCB	WC6	LCC	C5	C12	C12A	316	CF8M	F51	F53	
	-20 to 100	1480	1480	1480	1500	1395	1500	1500	1500	1500	1500	1500	1440	1440	1500	1500
	200	1360	1360	1360	1500	1320	1500	1500	1500	1500	1500	1500	1240	1240	1490	1490
	300	1310	1310	1310	1455	1275	1445	1455	1455	1455	1455	1455	1120	1120	1335	1335
	400	1265	1265	1265	1405	1230	1385	1405	1410	1410	1410	1410	1025	1025	1230	1230
	500	1205	1205	1205	1330	1175	1330	1330	1330	1330	1330	1330	995	995	1160	1160
	600	1135	1135	1135	1210	1105	1210	1210	1210	1210	1210	1210	900	900	1115	1115
	650	1100	1100	1100	1175	1065	1175	1175	1175	1175	1175	1175	885	885	1095	1095
	700	1060	1060	1060	1110	1025	1135	1110	1135	1135	1135	1135	870	870	1085	1085
	750	1015	1015	1015	1015	955	1065	1015	1065	1065	1065	1065	855	855	1065	1065
	800	825	825	825	825	780	1015	825	1015	1015	1015	1015	845	845	/	/
	850	640	640	640	640	595	975	640	975	975	975	975	835	835	/	/
	900	460	460	460	445	405	900	445	745	900	900	900	830	830	/	/
	950	275	275	275	275	275	640	275	550	755	775	775	775	775	/	/
	1000	170	170	170	170	170	430	170	400	505	725	725	725	725	/	/
	1050	/	/	/	/	/	290	/	290	345	720	720	720	720	/	/
	1100	/	/	/	/	/	190	/	200	225	605	610	610	610	/	/
1150	/	/	/	/	/	130	/	125	150	445	475	475	475	/	/	
1200	/	/	/	/	/	80	/	70	105	290	370	370	370	/	/	
1250	/	/	/	/	/	/	/	/	/	/	295	295	295	/	/	
1300	/	/	/	/	/	/	/	/	/	/	235	235	235	/	/	
1350	/	/	/	/	/	/	/	/	/	/	190	190	190	/	/	
1400	/	/	/	/	/	/	/	/	/	/	150	150	150	/	/	
1450	/	/	/	/	/	/	/	/	/	/	115	115	115	/	/	
1500	/	/	/	/	/	/	/	/	/	/	85	85	85	/	/	
900	Temp. F	A105	WCB	LF2	WCC	LCB	WC6	LCC	C5	C12	C12A	316	CF8M	F51	F53	
	-20 to 100	2220	2220	2220	2250	2090	2250	2250	2250	2250	2250	2160	2160	2250	2250	
	200	2035	2035	2035	2250	1980	2250	2250	2250	2250	2250	1860	1860	2230	2230	
	300	1965	1965	1965	2185	1915	2165	2185	2185	2185	2185	1680	1680	2000	2000	
	400	1900	1900	1900	2110	1845	2080	2110	2115	2115	2115	1540	1540	1845	1845	
	500	1810	1810	1810	1995	1760	1995	1995	1995	1995	1995	1435	1435	1740	1740	
	600	1705	1705	1705	1815	1655	1815	1815	1815	1815	1815	1355	1355	1670	1670	
	650	1650	1650	1650	1765	1600	1765	1765	1765	1765	1765	1325	1325	1640	1640	
	700	1590	1590	1590	1665	1535	1705	1665	1705	1705	1705	1305	1305	1625	1625	
	750	1520	1520	1520	1520	1430	1595	1520	1595	1595	1595	1280	1280	1595	1595	
	800	1235	1235	1235	1235	1175	1525	1235	1525	1525	1525	1265	1265	/	/	
	850	955	955	955	955	895	1460	955	1460	1460	1460	1255	1255	/	/	
	900	690	690	690	670	605	1350	670	1120	1350	1350	1245	1245	/	/	
	950	410	410	410	410	410	955	410	825	1130	1160	1160	1160	1160	/	/
	1000	255	255	255	255	255	650	255	595	760	1090	1090	1090	1090	/	/
	1050	/	/	/	/	/	430	/	430	515	1080	1080	1080	1080	/	/
	1100	/	/	/	/	/	290	/	300	340	905	915	915	915	/	/
1150	/	/	/	/	/	195	/	185	225	670	710	710	710	/	/	
1200	/	/	/	/	/	125	/	105	155	430	555	555	555	/	/	
1250	/	/	/	/	/	/	/	/	/	/	440	440	440	/	/	
1300	/	/	/	/	/	/	/	/	/	/	350	350	350	/	/	
1350	/	/	/	/	/	/	/	/	/	/	290	290	290	/	/	
1400	/	/	/	/	/	/	/	/	/	/	225	225	225	/	/	
1450	/	/	/	/	/	/	/	/	/	/	175	175	175	/	/	
1500	/	/	/	/	/	/	/	/	/	/	125	125	125	/	/	

# Pressure Temperature Ratings - ASME B16.34 - 2004 ■ ■ ■ ■ ■ ■ ■ ■ ■ ■

**Note:** Pressures in PSI

1500	Temp. F	A105	WCB	LF2	WCC	LCB	WC6	LCC	C5	C12	C12A	316	CF8M	F51	F53	
	-20 to 100	3705	3705	3705	3750	3480	3750	3750	3750	3750	3750	3750	3600	3600	3750	3750
	200	3395	3395	3395	3750	3300	3750	3750	3750	3750	3750	3750	3095	3095	3720	3720
	300	3270	3270	3270	3640	3190	3610	3640	3640	3640	3640	3640	2795	2795	3335	3335
	400	3170	3170	3170	3520	3075	3465	3520	3530	3530	3530	3530	2570	2570	3070	3070
	500	3015	3015	3015	3325	2930	3325	3325	3325	3325	3325	3325	2390	2390	2905	2905
	600	2840	2840	2840	3025	2755	3025	3025	3025	3025	3025	3025	2255	2255	2785	2785
	650	2745	2745	2745	2940	2665	2940	2940	2940	2940	2940	2940	2210	2210	2735	2735
	700	2665	2665	2665	2775	2560	2840	2775	2840	2840	2840	2840	2170	2170	2710	2710
	750	2535	2535	2535	2535	2385	2660	2535	2660	2660	2660	2660	2135	2135	2660	2660
	800	2055	2055	2055	2055	1955	2540	2055	2540	2540	2540	2540	2110	2110	/	/
	850	1595	1595	1595	1595	1490	2435	1595	2435	2435	2435	2435	2090	2090	/	/
	900	1150	1150	1150	1115	1010	2245	1115	1870	2245	2245	2245	2075	2075	/	/
	950	685	685	685	685	685	1591	685	1370	1885	1930	1930	1930	1930	/	/
	1000	430	430	430	430	430	1080	430	995	1270	1820	1820	1820	1820	/	/
	1050	/	/	/	/	/	720	/	720	855	1800	1800	1800	1800	/	/
	1100	/	/	/	/	/	480	/	495	565	1510	1525	1525	1525	/	/
	1150	/	/	/	/	/	325	/	310	375	1115	1185	1185	1185	/	/
	1200	/	/	/	/	/	205	/	170	255	720	925	925	925	/	/
	1250	/	/	/	/	/	/	/	/	/	/	735	735	735	/	/
1300	/	/	/	/	/	/	/	/	/	/	585	585	585	/	/	
1350	/	/	/	/	/	/	/	/	/	/	480	480	480	/	/	
1400	/	/	/	/	/	/	/	/	/	/	380	380	380	/	/	
1450	/	/	/	/	/	/	/	/	/	/	290	290	290	/	/	
1500	/	/	/	/	/	/	/	/	/	/	205	205	205	/	/	
2500	Temp. F	A105	WCB	LF2	WCC	LCB	WC6	LCC	C5	C12	C12A	316	CF8M	F51	F53	
	-20 to 100	6170	6170	6170	6250	5805	6250	6250	6250	3250	6250	6000	6000	6250	6250	
	200	5655	5655	5655	6250	5505	6250	6250	6250	6250	6250	5160	5160	6200	6200	
	300	5450	5450	5450	6070	5315	6015	6070	6070	6070	6070	4660	4660	5560	5560	
	400	5280	5280	5280	5865	5125	5775	5865	5880	5880	5880	4280	4280	5120	5120	
	500	5025	5025	5025	5540	4885	5540	5540	5540	5540	5540	3980	3980	4840	4840	
	600	4730	4730	4730	5040	4595	5040	5040	5040	5040	5040	3760	3760	4640	4640	
	650	4575	4575	4575	4905	4440	4905	4905	4905	4905	4905	3680	3680	4560	4560	
	700	4425	4425	4425	4630	4270	4730	4630	4730	4730	4730	3620	3620	4520	4520	
	750	4230	4230	4230	4230	3970	4430	4230	4430	4430	4430	3560	3560	4430	4430	
	800	3430	3430	3430	3430	3255	4230	3430	4230	4230	4230	3520	3520	/	/	
	850	2655	2655	2655	2655	2485	4060	2655	4060	4060	4060	3480	3480	/	/	
	900	1915	1915	1915	1855	1685	3745	1855	3115	3745	3745	3460	3460	/	/	
	950	1145	1145	1145	1145	1145	3655	1145	2285	3145	3220	3220	3220	3220	/	/
	1000	715	715	715	715	715	1800	715	1655	2115	3030	3030	3030	3030	/	/
	1050	/	/	/	/	/	1200	/	1200	1430	3000	3000	3000	3000	/	/
	1100	/	/	/	/	/	800	/	830	945	2515	2545	2545	2545	/	/
	1150	/	/	/	/	/	545	/	515	630	1855	1970	1970	1970	/	/
	1200	/	/	/	/	/	345	/	285	770	1200	1545	1545	1545	/	/
	1250	/	/	/	/	/	/	/	/	/	/	1230	1230	1230	/	/
1300	/	/	/	/	/	/	/	/	/	/	970	970	970	/	/	
1350	/	/	/	/	/	/	/	/	/	/	800	800	800	/	/	
1400	/	/	/	/	/	/	/	/	/	/	630	630	630	/	/	
1450	/	/	/	/	/	/	/	/	/	/	485	485	485	/	/	
1500	/	/	/	/	/	/	/	/	/	/	345	345	345	/	/	


# Flange Dimensions - ANSI B16.5 & B16.47

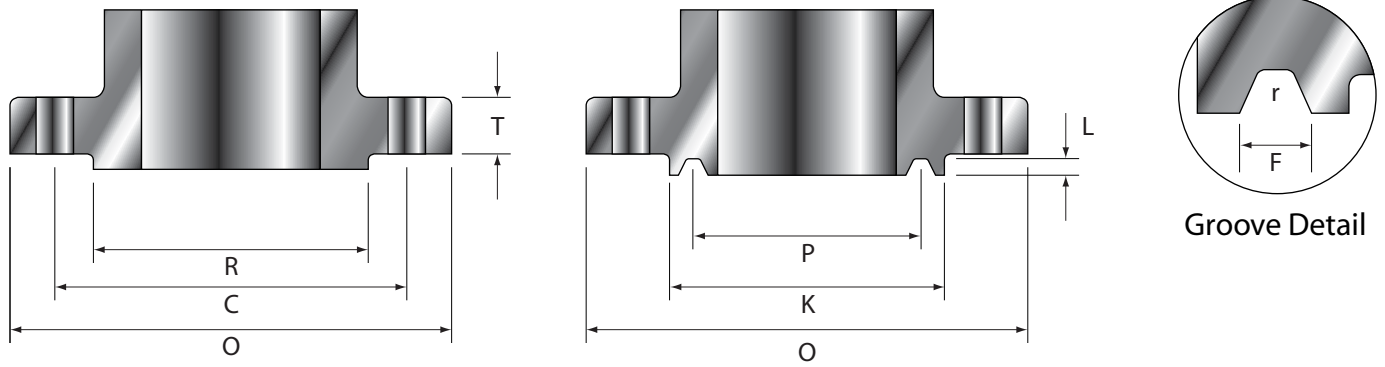

Class	Size	Flg. Dia.	Flg. Thick.	Raised Face Dia.	Drilling			Face Dia.	Ring Joint				
					Bolt Circle Dia.	# of Bolts	Hole Dia.		Pitch Dia.	Grv. Depth	Grv. Width	Btm. Radius	Ring No.
					C				P	L	F	r	
150	2	6.00	0.75	3.62	4.75	4	0.75	4.00	3.250	0.250	0.344	0.03	R22
	2.5	7.00	0.88	4.12	5.50	4	0.75	4.75	4.000	0.250	0.344	0.03	R25
	3	7.50	0.94	5.00	6.00	4	0.75	5.25	4.500	0.250	0.344	0.03	R29
	4	9.00	0.94	6.19	7.50	8	0.75	6.75	5.875	0.250	0.344	0.03	R36
	6	11.00	1.00	8.50	9.50	8	0.88	8.62	7.625	0.250	0.344	0.03	R43
	8	13.50	1.12	10.62	11.75	8	0.88	10.75	9.750	0.250	0.344	0.03	R48
	10	16.00	1.19	12.75	14.25	12	1.00	13.00	12.000	0.250	0.344	0.03	R52
	12	19.00	1.25	15.00	17.00	12	1.00	16.00	15.000	0.250	0.344	0.03	R56
	14	21.00	1.38	16.25	18.75	12	1.12	16.75	15.625	0.250	0.344	0.03	R59
	16	23.50	1.44	18.50	21.25	16	1.12	19.00	17.875	0.250	0.344	0.03	R64
	18	25.00	1.56	21.00	22.75	16	1.25	21.50	20.375	0.250	0.344	0.03	R68
	20	27.50	1.69	23.00	25.00	20	1.25	23.50	22.000	0.250	0.344	0.03	R72
	22	29.50	1.81	25.25	27.25	20	1.38	/	/	/	/	/	/
	24	32.00	1.88	27.25	29.50	20	1.38	28.00	26.500	0.250	0.344	0.03	R76
	26	34.25	2.69	29.50	31.75	24	1.38	/	29.500	0.500	0.781	0.060	R93
	28	36.50	2.81	31.50	34.00	28	1.38	/	31.500	0.500	0.781	0.060	R94
30	38.75	2.94	33.75	36.00	28	1.38	/	33.750	0.500	0.781	0.060	R95	
32	41.75	3.19	36.00	38.50	28	1.62	/	36.000	0.562	0.906	0.060	R96	
34	43.75	3.25	38.00	40.50	32	1.62	/	38.000	0.562	0.906	0.060	R97	
36	46.00	3.56	40.25	42.75	32	1.62	/	40.250	0.562	0.906	0.060	R98	
300	2	6.50	0.88	3.62	5.00	8	0.75	4.25	3.250	0.312	0.469	0.03	R23
	2.5	7.50	1.00	4.12	5.88	8	0.88	5.00	4.000	0.312	0.469	0.03	R26
	3	8.25	1.12	5.00	6.62	8	0.88	5.75	4.875	0.312	0.469	0.03	R31
	4	10.00	1.25	6.19	7.88	8	0.88	6.88	5.875	0.312	0.469	0.03	R37
	6	12.50	1.44	8.50	10.62	12	0.88	9.50	8.312	0.312	0.469	0.03	R45
	8	15.00	1.62	10.62	13.00	12	1.00	11.88	10.625	0.312	0.469	0.03	R49
	10	17.50	1.88	12.75	15.25	16	1.12	14.00	12.750	0.312	0.469	0.03	R53
	12	20.50	2.00	15.00	17.75	16	1.25	16.25	15.000	0.312	0.469	0.03	R57
	14	23.00	2.12	16.25	20.25	20	1.25	18.00	16.500	0.312	0.469	0.03	R61
	16	25.50	2.25	18.50	22.50	20	1.38	20.00	18.500	0.312	0.469	0.03	R65
	18	28.00	2.38	21.00	24.75	24	1.38	22.62	21.000	0.312	0.469	0.03	R69
	20	30.50	2.50	23.00	27.00	24	1.38	25.00	23.000	0.375	0.531	0.06	R73
	22	33.00	2.62	25.25	29.25	24	1.62	27.00	25.000	0.438	0.594	0.06	R81
	24	36.00	2.75	27.25	32.00	24	1.62	29.50	27.250	0.438	0.656	0.06	R77
	26	38.25	3.31	29.50	34.50	28	1.75	31.88	29.500	0.500	0.781	0.06	R93
	28	40.75	3.56	31.50	37.00	28	1.75	33.88	31.500	0.500	0.781	0.06	R94
30	43.00	3.75	33.75	39.25	28	1.88	36.12	33.750	0.500	0.781	0.06	R95	
32	45.25	3.94	36.00	41.50	28	2.00	38.75	36.000	0.562	0.906	0.06	R96	
34	47.50	4.12	38.00	43.50	28	2.00	40.75	38.000	0.562	0.906	0.06	R97	
36	50.00	4.38	40.25	46.00	32	2.12	43.00	40.250	0.562	0.906	0.06	R98	



# Flange Dimensions - ANSI B16.5 & B16.47

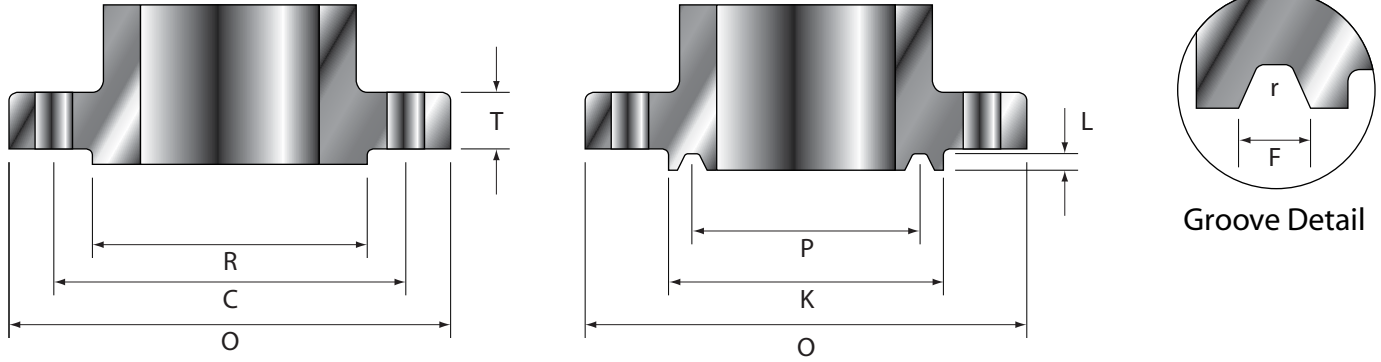

Class	Size	Flg. Dia.	Flg. Thick.	Circle Raise	Drilling			Face Dia.	Ring Joint				
					Bolt Circle Dia.	# of Bolts	Hole Dia.		Pitch Dia.	Grv. Depth	Grv. Width	Btm. Radius	Ring No.
600	2	6.50	1.00	3.62	5.00	8	0.75	4.25	3.250	0.312	0.469	0.03	R23
	2.5	7.50	1.12	4.12	5.88	8	0.88	5.00	4.000	0.312	0.469	0.03	R26
	3	8.25	1.25	5.00	6.62	8	0.88	5.75	4.875	0.312	0.469	0.03	R31
	4	10.75	1.50	6.19	8.50	8	1.00	6.88	5.875	0.312	0.469	0.03	R37
	6	14.00	1.88	8.50	11.50	12	1.12	9.50	8.312	0.312	0.469	0.03	R45
	8	16.50	2.19	10.62	13.75	12	1.25	11.88	10.625	0.312	0.469	0.03	R49
	10	20.00	2.50	12.75	17.00	16	1.38	14.00	12.750	0.312	0.469	0.03	R53
	12	22.00	2.62	15.00	19.25	20	1.38	16.25	15.000	0.312	0.469	0.03	R57
	14	23.75	2.75	16.25	20.75	20	1.5	18.00	16.500	0.312	0.469	0.03	R61
	16	27.00	3.00	18.50	23.75	20	1.62	20.00	18.500	0.312	0.469	0.03	R65
	18	29.25	3.25	21.00	25.75	20	1.75	22.62	21.000	0.312	0.469	0.03	R69
	20	32.00	3.50	23.00	28.50	24	1.75	25.00	23.000	0.375	0.531	0.06	R73
22	34.25	3.75	25.25	30.62	24	1.88	27.00	25.000	0.438	0.594	0.06	R81	
24	37.00	4.00	27.25	33.00	24	2.00	29.50	27.250	0.438	0.659	0.06	R77	
900	2	8.5	1.5	3.62	6.5	8	1	4.88	3.75	0.312	0.469	0.03	R24
	2.5	9.62	1.62	4.12	7.50	8	1.12	5.39	4.250	0.312	0.469	0.03	R27
	3	9.50	1.50	5.00	7.50	8	1.00	6.12	4.875	0.312	0.469	0.03	R31
	4	11.50	1.75	6.19	9.25	8	1.25	7.12	5.875	0.312	0.469	0.03	R37
	6	15.50	2.19	8.50	12.50	12	1.25	9.50	8.312	0.312	0.469	0.03	R45
	8	18.50	2.50	10.62	15.50	12	1.50	12.12	10.625	0.312	0.469	0.03	R49
	10	21.50	2.75	12.75	18.50	16	1.50	14.25	12.750	0.312	0.469	0.03	R53
	12	24.00	3.12	15.00	21.00	20	1.50	16.50	15.000	0.312	0.469	0.03	R57
	14	25.25	3.38	16.25	22.00	20	1.62	18.38	16.500	0.438	0.656	0.06	R62
	16	27.75	3.50	18.50	24.25	20	1.75	20.62	18.500	0.438	0.656	0.06	R66
	18	31.00	4.00	21.00	27.00	20	2.00	23.38	21.00	0.500	0.781	0.06	R70
	20	33.75	4.25	23.00	29.50	20	2.12	25.50	23.000	0.500	0.781	0.06	R74
24	41.00	5.50	27.25	35.50	20	2.62	30.38	27.250	0.625	1.062	0.09	R78	
1500	2	8.50	1.50	3.62	6.50	8	1.00	4.88	3.750	0.312	0.469	0.03	R24
	2.5	9.62	1.62	4.12	7.50	8	1.12	5.38	4.250	0.312	0.469	0.03	R27
	3	10.50	1.88	5.00	8.00	8	1.25	6.62	5.375	0.312	0.469	0.03	R35
	4	12.25	2.12	6.19	9.50	8	1.38	7.62	6.375	0.312	0.469	0.03	R39
	6	15.50	3.25	8.50	12.50	12	1.50	9.75	8.312	0.375	0.531	0.06	R46
	8	19.00	3.62	10.62	15.50	12	1.75	12.50	10.625	0.438	0.656	0.06	R50
	10	23.00	4.25	12.75	19.00	12	2.00	14.62	12.750	0.438	0.656	0.06	R54
	12	26.00	4.88	15.00	22.50	16	2.12	17.25	15.000	0.562	0.906	0.06	R58
	14	29.50	5.25	16.25	25.00	16	2.38	19.25	16.500	0.625	1.062	0.09	R63
	16	32.50	5.75	18.50	27.75	16	2.62	21.50	18.500	0.688	1.188	0.09	R67
	18	36.00	6.38	21.00	30.50	16	2.88	24.12	21.000	0.688	1.188	0.09	R71
	20	38.75	7.00	23.00	32.75	16	3.12	26.50	23.000	0.688	1.312	0.09	R75
24	46.00	8.00	27.25	39.00	16	3.62	31.25	27.250	0.812	1.438	0.09	R79	
2500	2	9.25	2.00	3.62	6.75	8	1.00	4.48	4.000	0.312	0.469	0.030	R26
	2.5	10.50	2.25	4.12	7.75	8	1.13	5.86	4.375	0.375	0.531	0.060	R28
	3	12.00	2.62	5.00	9.00	8	1.25	6.61	5.000	0.375	0.531	0.060	R32
	4	14.00	3.00	6.19	10.75	8	1.50	7.99	6.188	0.438	0.656	0.060	R38
	5	16.50	3.62	7.31	12.75	8	1.75	9.48	7.500	0.500	0.781	0.060	R40
	6	19.00	4.25	8.50	14.50	8	2.00	10.98	9.000	0.500	0.781	0.060	R47
	8	21.75	5.00	10.62	17.25	12	2.00	13.38	11.000	0.562	0.906	0.060	R51
	10	26.50	6.50	12.75	21.75	12	2.50	16.73	13.500	0.688	1.188	0.090	R55
12	30.00	7.25	15.00	24.38	12	2.75	19.48	16.000	0.688	1.312	0.090	R60	


# Butt-welding Dimensions - ANSI B16.25 .....

Nominal Pipe Size	Schedule Number or Wall	Outside Diameter (Cast Steel Valves) A		Nominal Inside Diameter B		Machined Inside Diameter C		Nominal Wall Thickness t	
		Inches	mm	Inches	mm	Inches	mm	Inches	mm
3	xxs	3-19/32	91.282	2.300	58.42	2.409	61.19	0.600	15.24
4	xxs	4-5/8	117.48	3.152	80.06	3.279	83.29	0.674	17.12
5	160	5-11/16	144.46	4.313	109.55	4.428	112.47	0.625	15.88
	xxs			4.063	103.20	4.209	106.91	0.750	19.05
6	120	6-25/32	172.34	5.501	139.72	5.600	142.24	0.562	14.27
	160			5.189	131.80	5.327	135.31	0.719	18.26
	xxs			4.897	124.38	5.072	128.83	0.864	21.95
8	100	8-23/32	223.04	7.439	188.93	7.546	191.67	0.594	15.09
	120			7.189	182.60	7.327	186.11	0.719	18.26
	140			7.001	177.83	7.163	181.94	0.812	20.62
	xxs			6.875	174.63	7.053	179.15	0.875	22.23
	160			6.813	173.05	6.998	177.75	0.960	23.01
10	50	10-15/16	277.81	9.564	242.93	9.671	245.64	0.594	15.09
	100			9.314	236.58	9.452	240.08	0.719	18.26
	120			9.064	230.23	9.234	234.54	0.844	21.44
	140			8.750	222.25	8.959	227.56	1.000	25.40
	160			8.500	215.90	8.740	222.00	1.125	28.58
12	60	12-31/32	329.41	11.626	295.30	11.725	297.82	0.562	14.27
	80			11.376	288.95	11.507	292.28	0.688	17.48
	100			11.064	281.03	11.234	284.34	0.844	21.44
	120			10.750	273.05	10.959	278.36	1.000	25.40
	140			10.500	266.70	10.740	272.80	1.125	28.58
	160			10.126	257.20	10.413	264.49	1.312	33.32
14	60	14-1/4	361.95	12.814	352.48	12.921	328.19	0.594	15.09
	80			12.500	317.50	12.646	321.21	0.750	19.05
	100			12.126	308.00	12.319	312.90	0.938	23.83
	120			11.814	300.08	12.046	305.97	1.094	27.79
	140			11.500	292.10	11.771	298.98	1.250	31.75
	160			11.188	284.18	11.498	292.05	1.406	35.71
16	60	16-1/4	412.75	14.688	373.08	14.811	376.20	0.656	16.66
	80			14.314	363.58	14.484	367.89	0.844	21.44
	100			13.938	354.03	14.155	359.54	1.031	26.19
	120			13.564	344.53	13.827	351.21	1.219	30.96
	140			13.124	333.35	13.442	341.43	1.438	36.53
	160			12.814	325.48	13.171	334.54	1.594	40.49
18	40	18-9/32	464.34	16.876	428.65	16.975	431.17	0.562	14.27
	60			16.500	419.10	16.646	422.81	0.750	19.05
	80			16.126	409.60	16.319	414.50	0.938	23.83
	100			15.688	398.48	15.936	404.50	1.156	29.36
	120			15.250	387.35	15.553	395.05	1.375	34.93
	140			14.876	377.85	15.225	386.72	1.562	39.67
	160			14.438	366.73	14.842	376.99	1.781	45.24
20	40	20-5/16	515.94	18.814	477.88	18.921	480.59	0.594	15.09
	60			18.376	466.75	18.538	470.87	0.812	20.62
	80			17.938	455.63	18.155	461.14	1.031	26.19
	100			17.438	442.93	17.717	450.01	1.281	32.54
	120			17.000	431.80	17.334	440.28	1.500	38.10
	140			16.500	419.10	16.896	429.16	1.750	44.45
	160			16.064	408.03	16.515	419.48	1.969	50.01
24	30	24-3/8	619.13	22.876	581.05	22.975	583.57	0.562	14.27
	40			22.626	574.70	22.757	578.03	0.688	17.48
	60			22.064	560.43	22.265	565.53	0.969	24.61
	80			21.564	547.73	21.827	554.41	1.219	30.96
	100			20.938	531.83	21.280	540.51	1.531	38.89
	120			20.376	517.55	20.788	528.02	1.812	46.02
	140			19.876	504.85	20.350	516.89	2.062	52.37
	160			19.314	490.58	19.859	504.42	2.344	59.54

# Butt-welding Dimensions - ANSI B16.25


## Plain Bevel Butt-welding End for Pipe Wall Thickness is 7/8" (22.23mm) or less.

Welding end details for cast components for use without backing ring or with split backing ring.

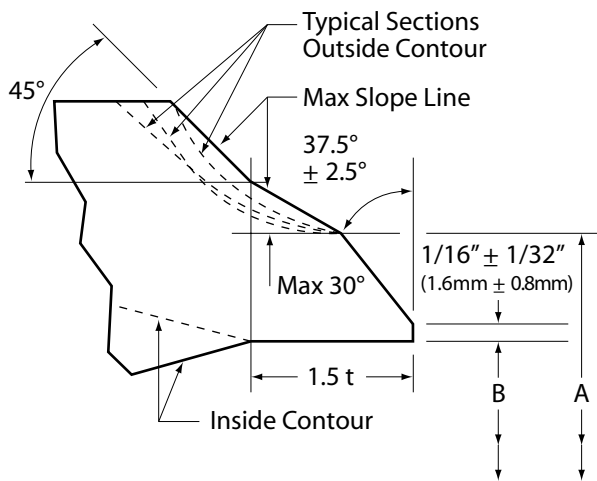


## Compound Bevel Butt-welding End for Pipe Wall Thickness Greater than 7/8" (22.23mm).

Welding end details for cast components for use without backing ring or with split backing ring.

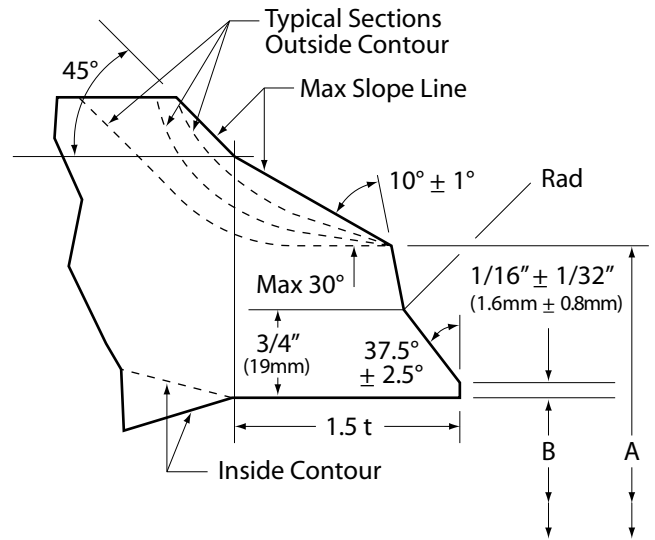


## Plain Bevel Butt-welding End for Pipe Wall Thickness is 7/8" (22.23mm) or less.

Welding end details for cast components for use with continuous rectangular or tapered backing ring.

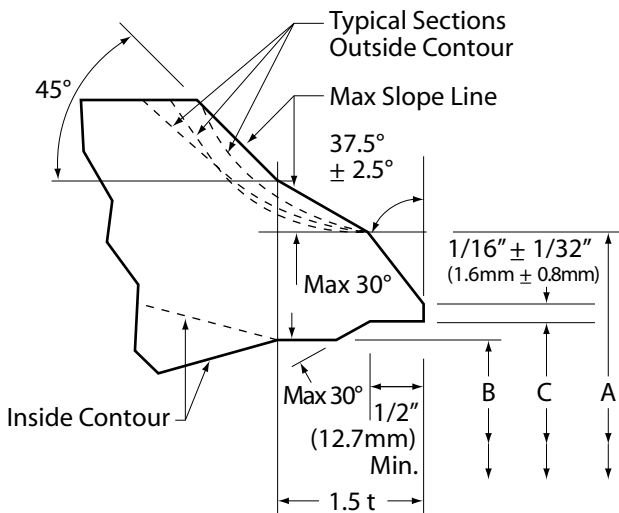

## Compound Bevel Butt-welding End for Pipe Wall Thickness Greater than 7/8" (22.23mm).

Welding end details for cast components for use with continuous rectangular or tapered backing ring.

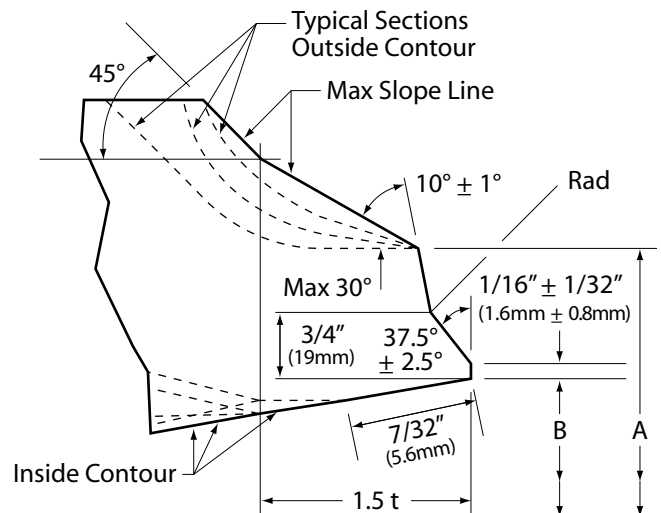

# Industry Standards for Valve Manufacturing

This information is for reference only.

## American Society of Mechanical Engineers (ASME)

ASME Code - Boiler & pressure vessel code  
ASME A13.1 - Scheme for the identification of piping systems  
ASME B1.1 - Unified inch screw threads, UN, & UNR thread form  
ASME B1.5 - ACME screw threads  
ASME B1.7M - Nomenclature, definitions, & letter symbols for screw threads  
ASME B1.8 - Stub ACME screw threads  
ASME B1.12 - Class 5 interference - fit thread  
ASME B1.20.1 - Pipe threads, general purpose, inch  
ASME B1.20.3 - Dry-seal pipe threads, inch  
ANSI/ASME B16.1 - Cast iron pipe flanges & flanged fittings  
ANSI/ASME B16.5 - Pipe flanges & flanged fittings: NPS 1/2" - 24"  
ASME B16.9 - Factory made wrought steel butt welding fittings  
ANSI/ASME B16.10 - Face-to-face & end-to-end dimensions of valves  
ASME B16.11 - Forged fittings, socket welding & threaded  
ASME B16.20 - Metallic gaskets for pipe flanges: ring joint spiral wound & jacketed  
ASME B16.21 - Non-metallic flat gaskets for pipe flanges  
ASME B16.25 - Butt welding ends  
ANSI/ASME B16.33 - Manually operated metallic gas valves for use in gas piping systems up to 125 PSI (sizes NPS 1/2" - 2")  
ANSI/ASME B31.1 - Power piping  
ANSI/ASME B31.3 - Process piping  
ANSI/ASME B16.34 - Valves flanged, threaded & welding end  
ANSI/ASME B16.36 - Orifice flanges  
ANSI/ASME B16.38 - Large metallic valves for gas distribution (manually operated, NPS 2-1/2" - 12", 125 PSIG maximum)  
ANSI/ASME B16.42 - Ductile iron pipe flanges & flanged fittings: classes 150 & 300  
ANSI/ASME B16.47 - Large diameter steel flanges  
ANSI B17.1 - Keys & keyseats  
ANSI B18.2.2 - Square & hex nuts  
ASME B31.4 - Pipeline transportation systems for liquid hydrocarbons & other ammonia & alcohols  
ANSI/ASME B31.8 - Gas transmission & distribution piping systems  
ANSI/ASME B36.10 - Welded & seamless wrought steel pipe  
ANSI/ASME B36.19 - Stainless steel pipe  
ANSI FCI-2 - Control valve seat leakage

## American Society Non-destructive Test (ASNT)

ASNT-TC-1A - Recommended practice no. SNT-TC-1A 1996

## American Society for Testing and Materials (ASTM)

### American Petroleum Institute (API)

API RP 574 - Inspection practices for piping system components  
API 589 - Fire test for evaluation of valve stem packing  
API RP 591 - Process valve qualification procedure  
API 594 - Check valves-flanged, lug, wafer & butt welding  
API 597 - Steel venturi gate valves, flanged, butt welding ends  
API 598 - Valve inspection & testing  
API 599 - Metal plug valves - flanged, welding ends  
API 601 - Metallic gaskets for raised-face pipe flanges & flanged connections (double-jacketed corrugated & spiral wound)  
API 600 - Bolted bonnet steel gate valves for petroleum & natural gas industries "ISO adoption from ISO 10434"  
API 602 - Steel gate, globe, & check valves for sizes DN100 and smaller for the petroleum & natural gas industries  
API 603 - Corrosion-resistant, bolted bonnet gate valves-flanged & butt weld ends  
API 604 - Ductile iron gate valves, flanged ends  
API 605 - Large-diameter carbon steel flanges (nominal pipe sizes 26" - 60", classes 75, 150, 300, 400, 600, & 900 (replaced by ANSI/ASME B16.47)  
API 606 - Compact steel gate valves, extended body (included in API 602) fire test for soft-seated quarter-turn valves "ISO adoption from ISO 10497-5 2004"  
API 607 - Fire test for soft-seated quarter-turn valves "ISO adoption from ISO 10497-5 2004"  
API 608 - Metal ball valves, flanged, threaded, & welding ends  
API 609 - Butterfly valves-double flanged, lug- & wafer-type  
API RP 941 - Steel for hydrogen service at elevated temperatures & pressures in petroleum refineries & petrochemical plants  
API RP 520, Part 1 - Sizing, selection & installation of pressure relieving devices in refineries  
API RP 520, Part 2 - Sizing, selection & installation of pressure relieving devices in refineries devices in refineries  
API Spec 6A - Specification for wellhead & christmas tree equipment  
API Spec 6D - Specifications for pipeline valves  
API Spec 14D - Specifications for wellhead surface safety valves & underwater safety valves for offshore service  
API 5B - Threading, gauging thread inspection of coring, tubing, & line pipe threads  
API 6AM - Material toughness  
API 6FA - Fire test for valves  
API 6FC - Fire test for valves with backseats  
API 6FD - Specification for fire test for check valves  
API Q1 - Specification for quality programs for the petroleum, petrochemical, & natural gas

## National Association of Corrosion Engineers (NACE)

MR0175 - Sulfide stress cracking resistant metallic materials for oil field equipment  
MR0103 - Materials resistant to sulfide stress cracking in corrosive petroleum refining environments

## British Standards Institute (BS)

BS 1414 - Gate, wedge & double disk valves: steel  
BS 1868 - Check valves: steel  
BS 1873 - Globe & check valves: steel  
BS 2080 - Flanged & butt weld end steel valves  
BS 5146 - (withdrawn) Replaced by BS 6755 p.1 steel valves testing (1986) & BS 6755 p.2 (1984)  
BS 5152 - Globe & check: cast iron  
BS 5153 - Check: cast iron  
BS 5159 - Ball: cast iron & carbon steel  
BS 5160 - Globe & check: steel  
BS 5163 - Gate, wedge & double disk: cast iron  
BS 5351 - Ball: steel  
BS 5352 - Globe & check: steel  
BS 5418 - (withdrawn) Replaced by BS EN 19 (1992) marking: general purpose industrial  
BS 5840 - Valve mating details for actuator operation  
BS 6364 - Cryogenic  
BS 6683 - Guide: installation & use of valves  
BS 6755: Part 1 - Specification for production pressure testing requirements  
BS 6755: Part 2 - Specification for fire type-testing requirements  
BS EN 19 - Marking of general purpose industrial valves

## Canadian Standards Association

BS1-97 - Boiler, pressure vessel, & pressure piping code  
Z245.15-96 - Steel valves  
CAN3-z299.4-85 - Quality assurance program - Category 4  
CAN3-z299.3-85 - Quality assurance program - Category 3

## International Organization for Standardization

ISO 5211/1 - Industrial valves- part-turn actuator attachments  
ISO 5211/2 - Part-turn valve actuator attachment-flange & coupling performance characteristics  
ISO 5211/3 - Part-turn valve actuator attachment-dimensions of driving components  
ISO 5752 - Metal valves for use in flanged pipe systems face-to-face & center-to-face dimensions  
ISO 9000 - Quality management systems and fundamentals & vocabulary  
ISO 10012-1 - Quality assurance requirements for measuring equipment

## Manufacturers Standardization Society

SP-6 - Standard finishes for contact faces of pipe flanges & connecting-end flanges of valves & fittings  
SP-9 - Spot facing for bronze, iron & steel flanges  
SP-25 - Standard marking system for valves, fittings, flanges & unions  
SP-42 - Class 150 corrosion resistant gate, globe, angle, & check valves with flanged & butt weld ends  
SP-44 - Steel pipeline flanges  
SP-45 - Bypass & drain connections  
SP-51 - Class 150/w corrosion resistant cast flanges & flanged fittings  
SP-53 - Quality standard for steel castings & forgings for valves, flanges, & fittings & other piping components: magnetic particle exam method  
SP-54 - Quality standard for steel castings for valves, flanges, & fittings and other piping components: radiographic examination method  
SP-55 - Quality standard for steel castings for valves, flanges other piping components-visual method for evaluation of surface irregularities  
SP-60 - Connecting flange joint between tapping sleeves & tapping valves  
SP-61 - Pressure testing of steel valves  
SP-65 - High pressure chemical industry flanges & threaded stubs for use with lens gaskets  
SP-67 - Butterfly valves  
SP-69) - ANSI/MSS edition pipe hangers & supports, selection & application  
SP-70 - Cast iron gate valves, flanged & threaded ends  
SP-71 - Gray iron swing check valves, flanged & threaded ends  
SP-72 - Ball valves with flanged or butt-welding ends for general service  
SP-79 - Socket-welding reducer inserts  
SP-81 - Stainless steel, bonnetless, flanged knife gate valves  
SP-82 - Valve pressure testing methods  
SP-84 - Valves - socket welding & threaded ends  
SP-85 - Cast iron globe & angle valves, flanged & threaded ends  
SP-86 - Guidelines for metric data in standards for valves, flanges, fittings & actuators  
SP-88 - Diaphragm valves  
SP-91 - Guidelines for manual operation of valves  
SP-92 - MSS valve user guide  
SP-93) - Quality standard for steel castings & forgings for valves, flanges & fittings & other piping components- liquid penetrant exam method  
SP-94 - Quality standard for ferritic & martensitic steel castings for valves, flanges, & fittings and other piping components - ultrasonic exam method  
SP-96 - Guidelines on terminology for valves & fittings  
SP-98 - Protective coatings for the interior of valves, hydrants, & fittings  
SP-99 - Instrument valves  
SP-101 - Part-turn valve actuator attachment-flange and driving component dimensions & performance characteristics  
SP-102 - Multi-turn valve actuator attachment: flange and driving component dimensions & performance characteristics  
SP-110 - Ball valves threaded, socket-welding, solder joint, grooved, & flared ends  
SP-117 - Bellows seals for globe & gate valves  
SP-118 - Compact steel globe and check valves-flanged, flangeless, threaded & welding ends (chemical & petroleum refinery service)  
SP-120 - Flexible graphite packing system for rising stem steel valves (design requirements)  
SP-121 - Qualification testing methods for stem packing for rising stem steel valves

# Terms & Conditions

## Quotation Validity

This quotation is valid for 30 days from the date quotation is sent. Validity on special metals, including Stainless Steel, is 14 days from the date the quotation is sent. All products offered from stock are subject to prior sale.

## Shipments

All items quoted are EXW our Dock - (Ex Works - SCV Facility Santa Fe Spings, California 90670) - unless otherwise noted and agreed to in writing. Shipment may be billed either third party billing to the buyer or freight collect. Shipment dates offered above are forecasted delivery lead times and are estimated from the date payment terms (acceptable to seller) are established, clarification is received on all technical information, and resolution of customer's written approval of drawings is received (when required). The equipment quoted shall be packed in accordance with seller's standard packing procedure unless otherwise noted and agreed to in writing by the seller.

## Force Majeure

If in the case of an act of God, war, riot, fire, explosion, flood, or any other circumstances of whatsoever nature which are beyond the control of the seller and which in any way affect the ability of the seller to fulfill its delivery obligations, the delivery is hindered, impeded, or delayed the seller shall be exonerated from all responsibilities and reserves the right to postpone the delivery beyond the original schedule.

## Payment terms

All terms are to be negotiated. Credit cards accepted (Master Card, Visa, American Express).

## Purchase Orders

All buyer's purchase orders supplied to the seller are to be written in the English language.

## Prices

All prices quoted are in USD as per the preceding pricing schedule. The minimum order value is \$5,000.00 (five thousand dollars), unless otherwise agreed to by seller. If for some reason any items are changed or additions to the order required, seller reserves the right to adjust prices accordingly. All sales are subject to approval of seller's credit department. If buyer fails to meet the agreed upon and established commercial terms of the contract, the seller may with-hold all subsequent deliveries until such time that the original commercial terms of the contract have been met by the buyer (or subsequent commercial terms have been agreed upon by the seller with the buyer).

## Intellectual Property

All specifications, illustrations, drawings, certificates, and other particulars supplied by seller remain the intellectual property of the seller and should not be disclosed to any third party without the prior written consent of seller.

## Governing Law; Arbitration; Jurisdiction

The terms and conditions of this quotation and any subsequent purchase order shall be construed, interpreted, and performed exclusively according to the laws of the State of Texas, USA. The courts of such state shall have exclusive jurisdiction out of all controversies arising out of or in connection with this agreement. The parties consent that process may be served upon them in any such action by registered mail at the address stated for Buyer on its purchase order, and upon SCV at the address noted above in Santa Fe, Texas, or personally within or without the State of Texas. Any legal action with respect to any agreement must be commenced within one year after the cause of action has accrued. The provisions of the Uniform Commercial Code as adopted by the State of Texas, and not under the United Nations Convention on Contracts for the International Sale of Goods, shall apply.

## Warranty

All seller's products are guaranteed against defects in workmanship for a period of twelve (12) months after being placed in service, but not exceeding eighteen (18) months after shipment, when products are properly installed per seller specifications and used within the service and pressure range for which they were manufactured. Full risk of loss shall pass to the buyer upon delivery at FOB point, or destination port in case of CIF. This guarantee is limited to the replacement of any valve parts/components found to be defective either in material or workmanship. This guarantee does not extend to costs of labor, freight, or any other consequential charges. The unauthorized use of third party components and workmanship in seller's products voids this warranty.

## Limitation of Liability

The liability of the seller under this agreement or with respect to any products supplied or services performed pursuant to this agreement, whether in contract, in tort, in strict liability or otherwise, shall not exceed the purchase price paid by the buyer with respect thereto. In no event will the seller be liable in contract, in tort, in strict liability or otherwise for any special, indirect, incidental, or consequential damages. This is including but not limited to loss of anticipated profits or revenues, loss of use, non-operation or increased expense of operation of equipment, cost of capital, or claims from customer or buyer for failure or delay in achieving anticipated profits or products.

## Cancellation

No contract may be canceled by the buyer except upon written notice to seller and upon payment to seller of all costs incurred by the contract arising out of, or in connection with, the contract. Export of goods covered hereby is subject to United States Customs Control. Standard stocking items will be subject to a twenty-five percent (25%) restocking and/or cancellation charge. Non-standard stocking items will be subject to a one-hundred percent (100%) restocking and/or cancellation charge.

## Cancellation Charge

The following indicates the rates of cancellation charge of contract value for project manufactured items and/or special engineered items at various stages of production:

- **Time of cancellation: Order Acknowledgement and prior to Engineering engagement.** Cancellation Charge: 10%
- **Time of cancellation: After start of engineering but prior to release to production.** Cancellation Charge: 30%
- **Time of cancellation: After release to production but prior to completion of fabrication.** Cancellation Charge: 80%
- **Time of cancellation: After completion of fabrication.** Cancellation Charge: 100%

## Return of Goods

No product shall be returned to seller without written authorization and shipping instructions having been obtained from seller. Products authorized for returns are to be shipped freight pre-paid to the SCV Facility identified in writing, unless otherwise notified, and are subject to seller's standard re-stocking fees.

## Documentation

MTR's are available at no charge upon request. The seller's standard document package is per ISO 10474 3.1B requirements. Additional requested documentation is subject to charge.

## Inspection

The customer or his authorized representative may, with four (4) weeks prior notice given to seller, visually inspect products manufactured by seller. Such seller approved inspections will be carried out in accordance with seller's standard or seller approved customer inspection procedures. If any inspection or documentation requested by the customer is over and beyond the scope and criteria initially agreed to by the seller, any costs incurred by conducting such inspection or preparation of special documents shall be paid by the buyer prior to release of the items for shipment.

## Witness Hydro-testing

Witness hydro-testing is available at a cost. A scope of buyers inspection request is to be provided to seller at order placement. Late notice of such requested inspection is subject to additional costs. The cost associated with such witness hydro request is to be agreed on prior to any such testing taking place. Payment of this type of testing to be negotiated. Additionally, any costs associated with a third party inspector will not be at the sellers expense.



Southern California Valve was established in 1972 as a maintenance and modification company with the ability to provide full in-line valve service and repair. In the mid-1970's, after experiencing the shortcomings of other valve products in service, SCV manufactured its first valve. Since that time, Southern California Valve has expanded our manufactured products to cover a broad range of valves. Industries served include the power, paper and pulp, oil and gas, and petro-chemical sectors.


Southern California Valve takes sincere pride in our ability to manufacture both commodity and specialty valves that meet and exceed the needs of our customers. All sizes, pressure classes, and metallurgical compositions are managed in house utilizing the strictest quality control measures to ensure the customer's total satisfaction.

Southern California Valve products include gates, globes, checks, balls, and plugs. Valves utilized throughout the industry must meet rigorous quality and production standards. Southern California Valve has earned its API 6A, API 6D, ISO: 9001, CE-PED, and CRN certifications while operating under the API Q1 Quality Management System.

With years of dedication and commitment to quality, design, and service, Southern California Valve has grown to be one of the premier valve manufacturers in the industry with the largest inventory of high pressure ball, gate, and check valves on the West Coast. We pride ourselves on our high quality products, timely delivery capabilities, and competitive prices.

On behalf of all of the members at Southern California Valve, we thank you for the opportunity to earn your business.

Sincerely,

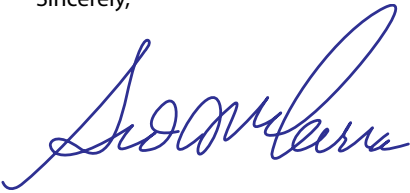

Sid McCarra  
President - Texas Operations  
Southern California Valve

Since 1972, Southern California Valve has been committed to providing quality flow control products to the Power, Paper & Pulp, Oil & Gas, and Petro Chemical industries.

As one of the largest valve manufacturers on the West Coast, Southern California Valve's reputation is unparalleled for producing high quality commodity and specialty valves. Products range in sizes 1/4" - 84", in pressure classes from 150# - 2500# and are backed by timely deliveries and competitive prices.

Call SCV today at (281)482-4728 for all your valve needs or visit us on the web @ [www.scvvalve.com](http://www.scvvalve.com).

**SALES, PROJECTS, ENGINEERING,  
MANUFACTURING, & WAREHOUSING**

3521 FM 646 Rd. North  
Santa Fe, TX 77510  
Phone: (281) 482-4728  
Fax: (281) 482-9728

Hours: 8:00 a.m. to 5:00 p.m. Central Standard  
Email: [sales@scvvalve.com](mailto:sales@scvvalve.com)

**MANUFACTURING &  
WAREHOUSING**

13903 Maryton Ave.  
Santa Fe Springs, CA 90670  
Phone: (562) 404-2246  
Toll Free: (800) 554-6421

Fax: (562) 404-2836  
Hours: 8:00 a.m. to 5:00 p.m. Pacific



**Southern California Valve**

**(281) 482-4728 • [www.scvvalve.com](http://www.scvvalve.com)**